


Designed without the use of springs allowing for easy access through the door. Ideal for use above fixed ladders.

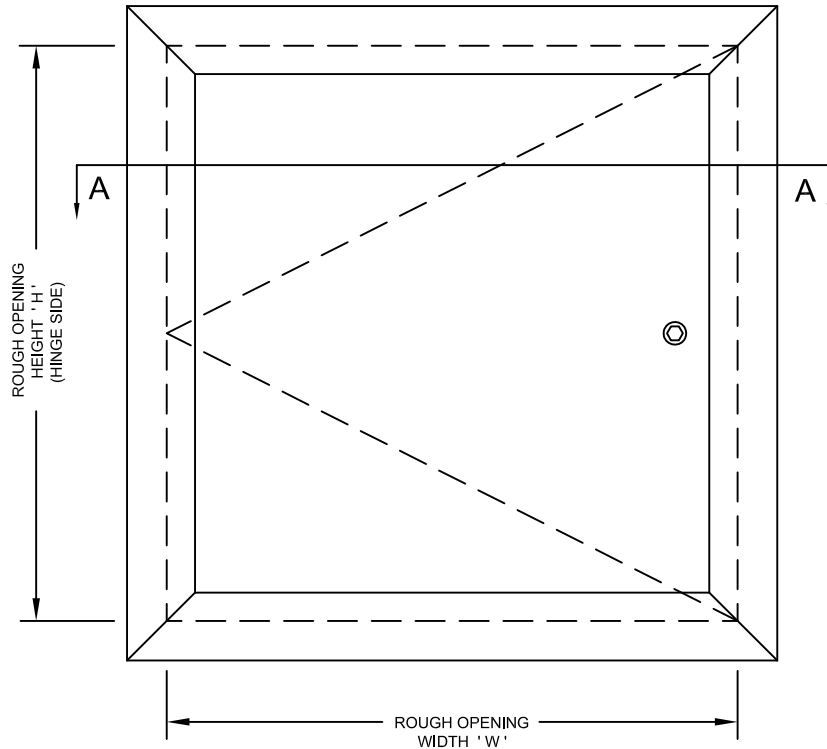


FRONT ELEVATION

STANDARD CONSTRUCTION:

- MATERIAL** - SATIN FINISH GALVANIZED (GALVANNEALED) STEEL.
- PANEL** - 1.31mm [18 ga.], SELF CLOSING c/w INSIDE LIFTING HANDLE.
- LINER** - 0.85mm [22ga.]
- FRAME** - 1.61mm [16 ga.]
- FLANGE** - 22mm [$\frac{7}{8}$ "] EXTERIOR FLANGE. 38mm [$1\frac{1}{2}$ "] OVERALL WIDTH.
- HINGE** - CONTINUOUS PIANO HINGE.
- LATCH** - $\frac{3}{4}$ " ALLEN KEY, WITH INTERIOR RELEASE.
- INSULATION** - 38mm [$1\frac{1}{2}$ "] HIGH TEMPERATURE
- FINISH** - RUST INHIBITIVE PRIME COAT (OFF-WHITE).

* Specifications subject to change without notice.

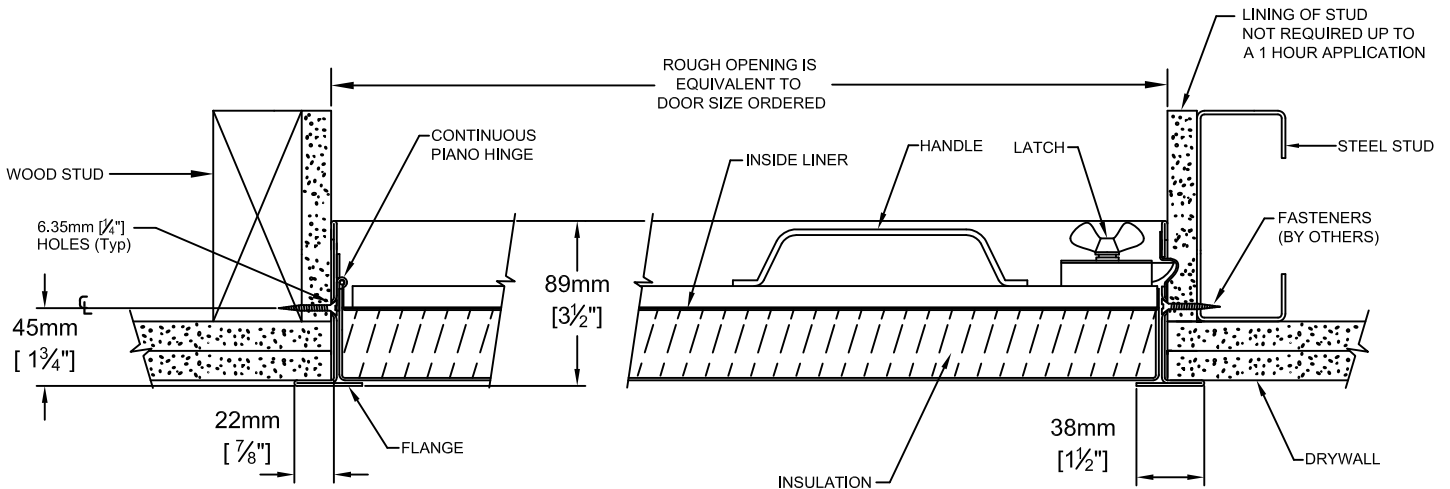

SECTION A-A


PROJECT: _____

CONTRACTOR: _____

ARCH. OR ENG.: _____

DATE: _____

These drawings are the property of Maxam Metal Products Ltd. and incorporates information which is proprietary. Publication and/or public distribution in whole or in part is expressly prohibited without the prior written consent of Maxam Metal Products Ltd. The information herein remains the property of Maxam Metal Products Ltd. All rights reserved.

| | | | |
|--------------|---------------------|--------------------------|---|
| DWN BY KB | DATE Feb. / 2014 | DWG. NO. Sheet 1 of 3 | REV.  |
|--------------|---------------------|--------------------------|---|

OPTIONS: * - DENOTES ADDITIONAL COST.

MATERIAL :-


- STANDARD MATERIAL - GALVANNEALED STEEL. SEE SHEET 1 OF 3.

* - OPTIONAL MATERIAL - 304 STAINLESS STEEL WITH A NO. 4 POLISHED FINISH ON THE EXTERIOR SURFACE.

HARDWARE :-

- STANDARD HARDWARE - ¼" ALLEN KEY. SEE SHEET 1 OF 3.

- OPTIONAL HARDWARE

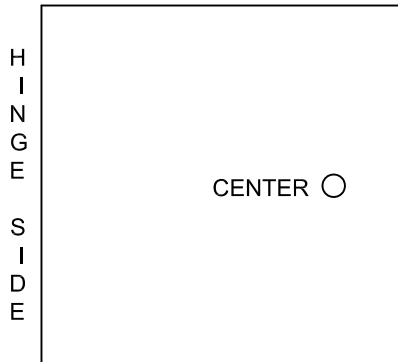

CENTER LATCH

- ALLEN KEY

- RAISED KNURLED KNOB.

* - NON-LOCKING HANDLE.

* - 1⅝" MORTISE PREP ONLY.

* - 1⅝" MORTISE PREP COMPLETE WITH MORTISE CYLINDER.

PROJECT: _____

PURCHASE ORDER: _____

CONTRACTOR: _____

APPROVED BY: _____

ARCH. OR ENG.: _____

DATE: _____