



VAN-MET® **MODEL FFM - Two Hour Fire-Rated
Uninsulated Surface Mount for Wall Application**

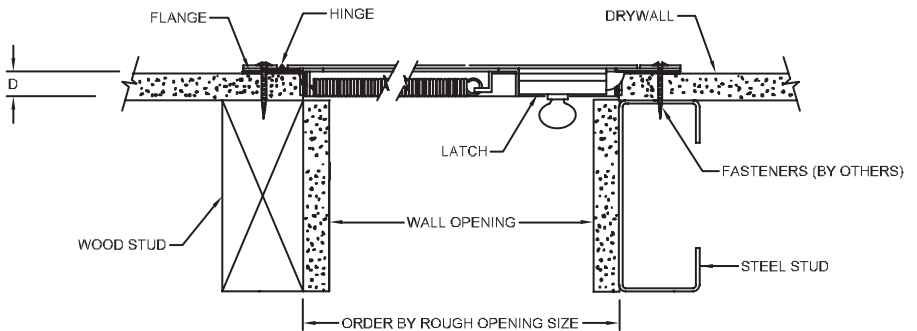

Model FFM designed to maintain the continuity of a fire barrier when installed in a **vertical separation**. The assembly is manufactured under the factory inspection service of Intertek (Warrnck Hersey) and has a label reading: "Listed access frame and fire door assembly. **2 hour fire rating**. Vertical installation only. No temperature rise rating"

- Surface mount, 16mm (5/8") deep door assembly.
- Ideal when objects (pipes etc.) interfere with the standard inner door frame.
- Quick installation, surface mounting holes
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line, so uniformity of design is maintained when the doors are installed in the same building.

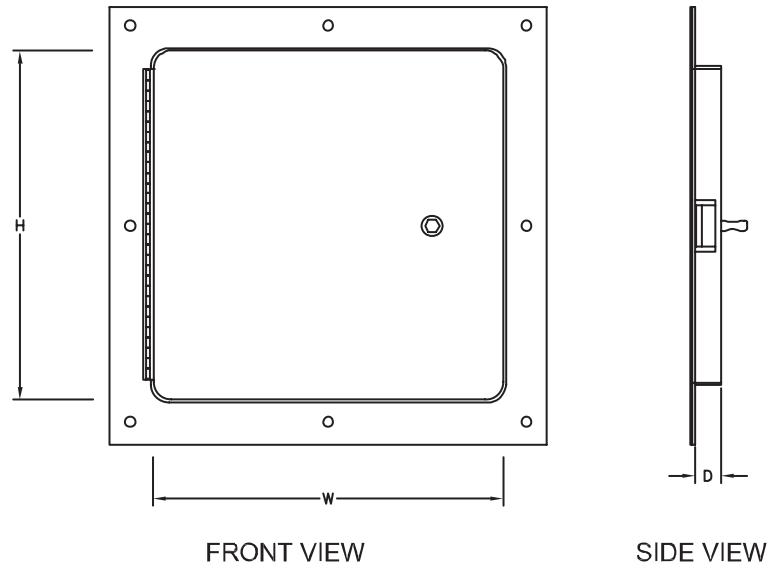

Material

Satin finish galvanized (bonderized) steel
Frame: 1.61mm (16ga)
Panel: 1.61mm (16ga)

Finish

The paint finish is an electrostatically applied rust inhibitive prime coat (off-white)

Hinge

Continuous piano hinge.

Latch

The standard factory installed latch is a flush mount 1/4" allen key. All fire-rated locks are self-latching and include an interior latch release mechanism allowing the doors to be opened from the inside.

Flange

37mm (1 7/16") exterior flange

Frame Depth

"D" = 16mm (5/8")
[Overall Dimension = 13/16"]

Ordering

Please order by finished rough opening size. These doors are non-returnable.

Installation

The panel is surface mounted through all the holes on the outer flange. Review installation drawings before installing. The number of mounting holes will vary with the size of the door.