



**VAN-MET® MODEL NAT - Acoustical Tile**


manufactured to  
the **VAN-MET®**  
design standard

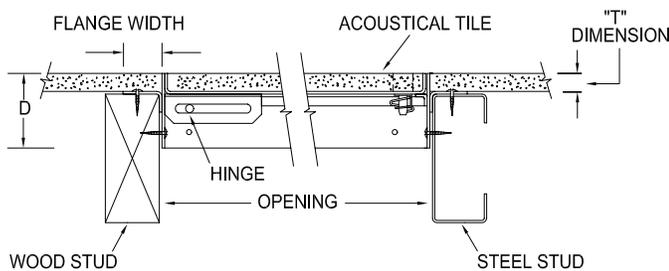

- Designed to conform to the architectural design of ceiling and wall tiles.
- Panel is recessed to accommodate acoustical tile or other materials.
- Acoustical tile is attached with adhesive mastic to the door and finished flush with the surrounding tiles, aiding in sound control.
- After finishing is complete, the door panel and frame are concealed.
- Standard panel depth and "T" dimension is 16mm (5/8"). Other panel depths and "T" dimensions are available upon request.
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line.

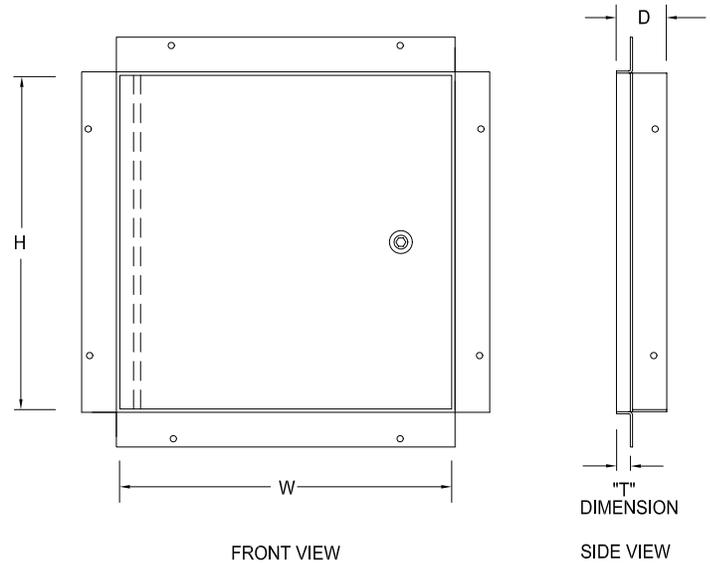

**Concealed Rod Hinge**

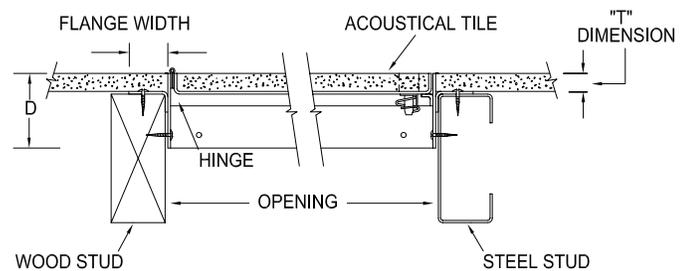

**Optional: Piano Hinge**

**Material**

Satin finish galvanized steel  
Frame - 1.61mm (16ga)  
Panel - 1.61mm (16ga)

**Finish**

The paint finish is an electrostatically applied rust inhibitive prime coat.

**Hinges**

**Rod Hinge**

The concealed rod hinge is designed to secure the door panel. The hinge is placed on the long side of the door ("H" dimension) unless otherwise requested.

**Optional: Piano Hinge**

The continuous piano hinge allows the door panel to open 175° for easy access. The hinge is placed on the long side of the door ("H" dimension) unless otherwise requested.

**Note:** Piano hinge standard on doors greater than 610mm x 914mm (24" x 36").

**Latch**

**Standard**

3/16" allen key cam available in 1/2" or in a 5/8" panel depth.

**Optional Lock**

Cylinder key lock is required for panel depths over 16mm (5/8") up to 25mm (1").

**Flange**

Concealed flange  
Width - 32mm (1 1/4")

**Frame Depth**

"D" = 48mm (1 7/8")

**Panel Depth**

Standard - 16mm (5/8")  
Other depths are available upon request.

**"T" dimension**

Standard - 16mm (5/8")  
Other dimensions available upon request.

**Ordering**

When ordering, please specify the "T" dimension: depth of flange you require (i.e. "T" dimension = 16mm (5/8")). Please specify the panel depth you require and order by rough opening size. These doors are non-returnable.

**Installation**

The outer concealed flange and inner frame are manufactured with mounting holes. For a square fit, keep the door panel closed while installing. Install before your finishing material is applied.

See size and weight chart on page 25.