



**VAN-MET® MODEL NFM - Flush Mount**

manufactured to  
the **VAN-MET®**  
design standard

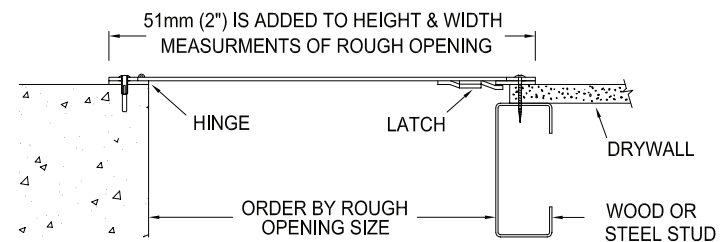

- Surface mount, no inner frame.
- Ideal when objects (pipes etc.) interfere with the placement of the inner door frame.
- Perfect for odd shaped openings in a wall or ceiling application.
- The panel is secured to the outer flange with a continuous piano hinge, which allows the door panel to open 175° for easy access.
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line, so uniformity of design is maintained when the doors are installed in the same building.

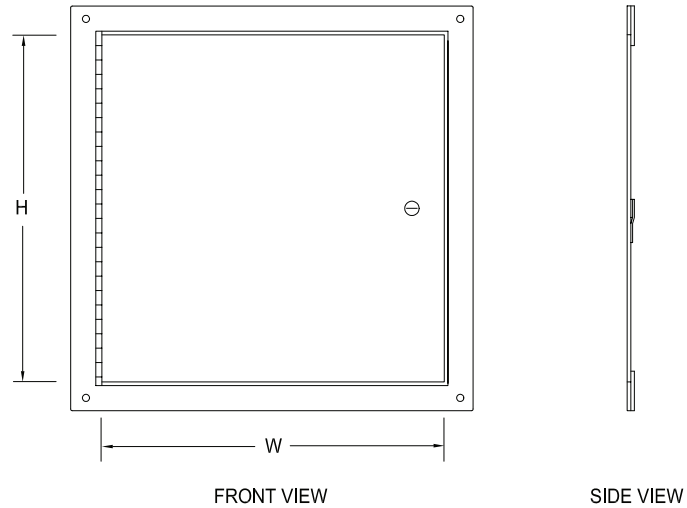

**Materials**

Satin finish galvanized steel or  
304 stainless steel  
Frame - 1.61mm (16ga)  
Panel - 1.61mm (16ga)

**Finishes**

The paint finish is an electrostatically applied  
rust inhibitive prime coat or a No. 4 polished  
stainless steel finish on the exterior surface.

**Hinge**

The continuous piano hinge allows the door  
panel to open 175° for easy access. The  
hinge is placed on the long side of the door  
("H" dimension) unless otherwise requested.

**Latch**

**Standard**

Screwdriver operated cam latch(es)

**Optional Latches**

3/16" allen key cam  
Non-locking two position handle

**Optional Lock**

Cylinder key lock

**Flange / Frame**

Width - 25mm (1")

**Ordering**

Please order by rough opening size.  
See sizing chart for detailed information.  
These doors are non-returnable.

**Installation**

The panel is surface mounted through  
the holes on the outer flange.

See size and weight chart on page 24.