




MAXAM
METAL PRODUCTS

5 7978 North Fraser Way
Burnaby, B.C. V5J 0C7
Tel: 604 433 4243
Fax: 604 433 4148
E-mail: info@maxammetal.com

MODEL NHS - High Security Door
VAN-MET® NON-RATED ACCESS DOOR

Designed for situations requiring heightened security.

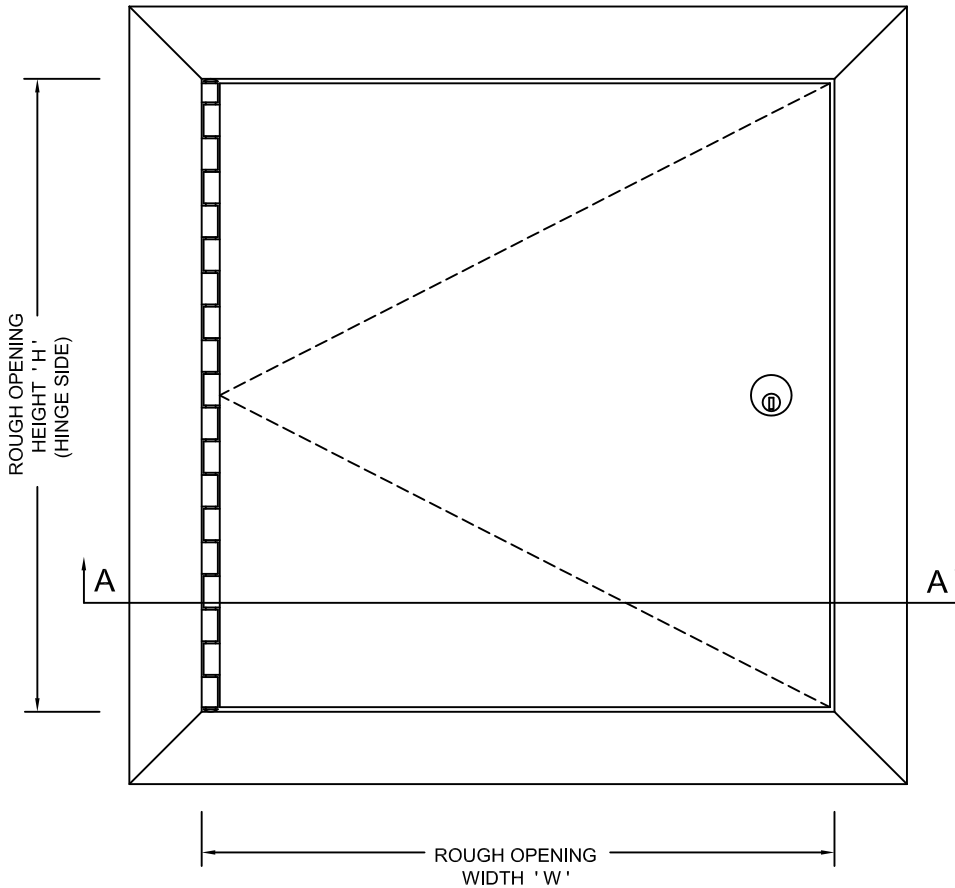


FRONT ELEVATION

STANDARD CONSTRUCTION:

- MATERIAL** - ALL STEEL CONSTRUCTION.
- PANEL** - 3.40mm [10 ga], RETURN FLANGE ON PERIMETER.
- FRAME** - 3.40mm [10 ga], ALL WELDED CONSTRUCTION.
- FLANGE** - 51mm [2"] EXTERIOR FLANGE.
- HINGE** - CONTINUOUS PIANO HINGE, NON-REMOVABLE PIN.
- LOCK** - DEAD BOLT WITH A SCHLAGE "C" KEYWAY.
- FINISH** - RUST INHIBITIVE PRIME COAT (OFF-WHITE).

* Specifications subject to change without notice.

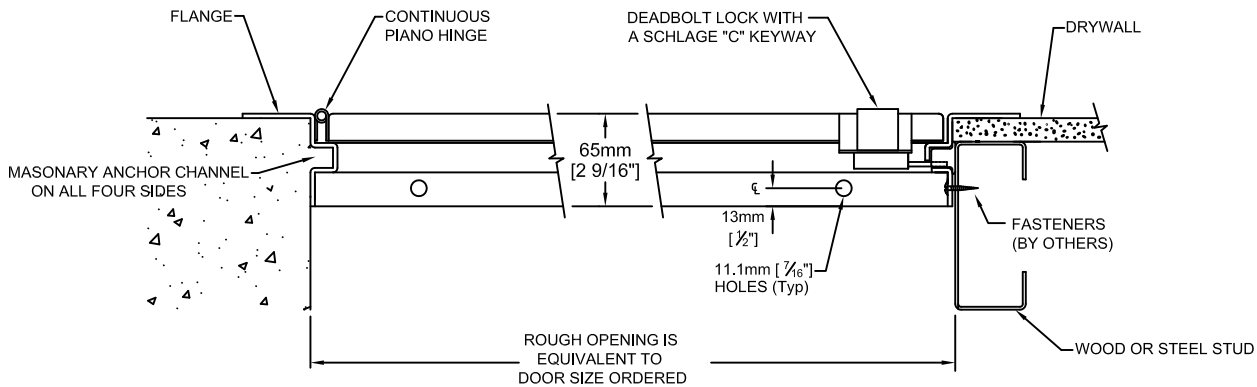

SECTION A-A

PROJECT: _____

CONTRACTOR: _____

ARCH. OR ENG.: _____

DATE: _____

These drawings are the property of Maxam Metal Products Ltd. and Incorporates Information which is proprietary. Publication and/or public distribution in whole or in part is expressly prohibited without the prior written consent of Maxam Metal Products Ltd. The information herein remains the property of Maxam Metal Products Ltd. All rights reserved.

DWN BY KB	DATE Feb. / 2014	DWG. NO. Sheet 1 of 2	REV. 0
--------------	---------------------	--------------------------	-----------



INSTALLATION:

The frame is manufactured with mounting holes. Factory installed anchor straps are available for masonry, upon request.

WARRANTY:

One Year Limited warranty. For complete details see **Access Door** warranty document.

OPTIONS: * - DENOTES ADDITIONAL COST.

- * - 304 STAINLESS STEEL WITH A NO. 4 POLISHED FINISH ON THE EXTERIOR SURFACE.
- * - MOUNTING BRACKETS FOR ANTI-TAMPER SWITCH(ES).
- * - DETENTION LOCK PREPARATION.
- * - MASONRY ANCHOR STRAPS ATTACHED.
- * - ADDITIONAL LOCKS IF REQUIRED.

ORDERING:

- PLEASE ORDER BY ROUGH OPENING SIZE.
- WHEN ORDERING THE SECOND DIMENSION GIVEN IS THE HINGE SIDE. (ie. 457mm x 610mm [18" x 24"], THE 610mm [24"] DIMENSION IS THE HINGE SIDE.

- THESE DOORS ARE NON-RETURNABLE.

NHS - STANDARD SIZES

Rough Opening Size W x H		No. of Locks	Weight in kgs.	Weight in lbs.
Metric (mm)	Inches			
203 x 203	8 x 8	1	3.62	8.00
305 x 305	12 x 12	1	6.12	13.50
406 x 406	16 x 16	1	9.07	20.00
457 x 457	18 x 18	1	10.88	24.00
457 x 610	18 x 24	1	13.60	30.00
457 x 762	18 x 30	1	16.32	36.00
559 x 762	22 x 30	1	19.05	42.00
610 x 610	24 x 24	1	17.23	38.00
610 x 762	24 x 30	1	20.41	45.00
610 x 914	24 x 36	1	24.04	53.00
610 x 1016	24 x 40	2	26.30	58.00
610 x 1219	24 x 48	2	30.84	68.00
914 x 914	36 x 36	2	33.11	73.00
914 x 1016	36 x 40	2	36.28	80.00
914 x 1219	36 x 48	2	42.63	94.00
1219 x 1219	48 x 48	2	56.70	125.00
1219 x 1524	48 x 60	2	72.57	160.00



PROJECT SCHEDULE

- millimeters
- inches

Qty	Rough Opening Size		No. of Locks	Options
	Width	Height		



Net Opening = **Width** minus 41mm [1⁵/₈"]
Height minus 41mm [1⁵/₈"]

PROJECT: _____

PURCHASE ORDER: _____

CONTRACTOR: _____

APPROVED BY: _____

ARCH. OR ENG.: _____

DATE: _____