



## VAN-MET® MODEL NSD - Security Door

manufactured to the **Van-Met®** design standard

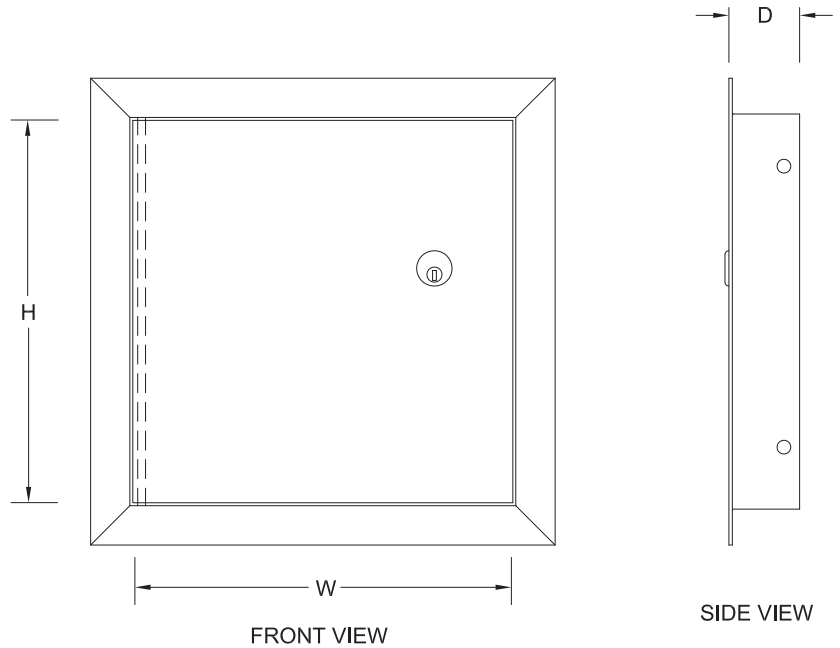

- Designed for areas where additional security is required.
- Manufactured with a 2.75mm (12ga) steel door and a fully welded 2.75mm (12ga) steel frame.
- Continuous rod hinge is concealed for a more pleasing appearance.
- For added security, larger sizes come standard with a panel stiffener.
- The number of locks vary according to the door size or to meet your specifications.
- Available with brackets for mounting an Anti-Tamper Switch(es).
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line, so uniformity of design is maintained when the doors are installed in the same building.

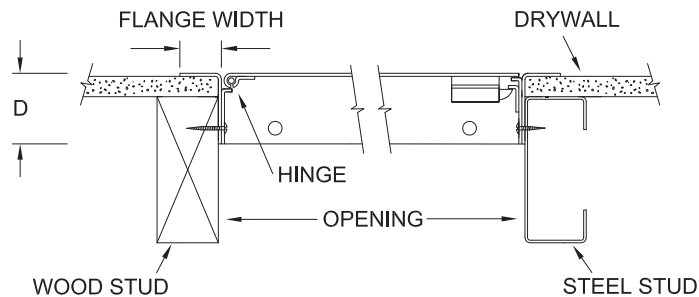

### Materials

Satin finish galvanized steel or 304 stainless steel  
 Frame - 2.75mm (12ga)  
 Panel - 2.75mm (12ga)

### Finishes

The paint finish is a rust inhibitive off-white prime coat or a No. 4 polished stainless steel finish on the exterior surface.

### Hinges

The concealed continuous rod hinge secures the panel, which makes tampering extremely difficult. The hinge is placed on the long side of the door ("H" dimension) unless otherwise requested.

### Optional Hinges

Continuous piano hinge  
 Heavy duty butt hinge

### Lock

#### Standard

The standard factory installed lock is a 1<sup>1</sup>/<sub>8</sub>" mortise prep complete with mortise cylinder.

#### Optional

1<sup>1</sup>/<sub>8</sub>" mortise prep only

### Flange

Exterior flange  
 Width - 32mm (1<sup>1</sup>/<sub>4</sub>")

### Frame Depth

"D" = 57mm (2<sup>1</sup>/<sub>4</sub>")

### Ordering

Please order by rough opening size. These doors are non-returnable.

### Installation

The frame is manufactured with mounting holes. Factory installed anchor straps are available for masonry upon request.

See size and weight chart on page 24.