



**VAN-MET® MODEL NSS - Exterior Flange
Stainless Steel**

manufactured to
the **VAN-MET®**
design standard

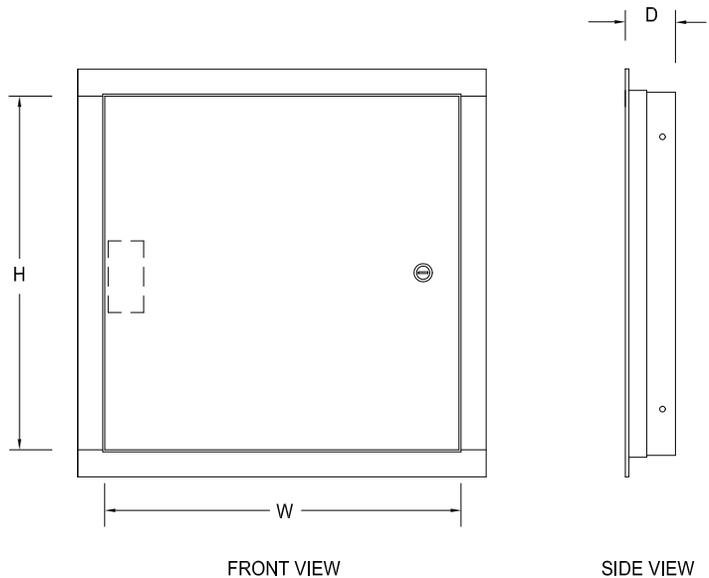

- Ideal when doors are required in sanitary environments such as hospitals, schools, restaurants, or other commercial institutions.
- Designed for situations which require additional resistance to corrosion.
- Surface mounted, installed after the finishing materials have been applied. Simply frame in, cut your rough opening and install.
- Designed with an exposed flange width to proportionally match the size of the door panel, creating an attractive appearance.
- Flange width can be customized to suit your needs.
- Available in stock sizes or made to your specifications.
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line, so uniformity of design is maintained when the doors are installed in the same building.

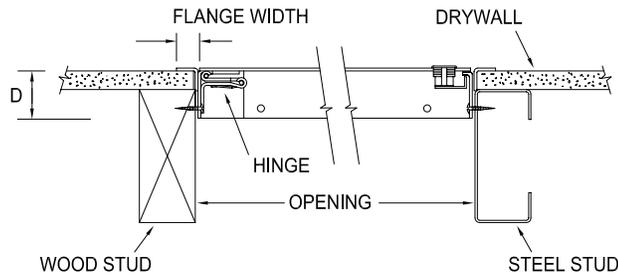

Material

304 stainless steel
 Frame - 1.31mm (18ga) stainless steel up to 508mm x 508mm (20" x 20")
 Larger sizes - 1.61mm (16ga)
 Panel - 1.61mm (16ga) stainless steel up to 508mm x 508mm (20" x 20")
 Larger sizes - 1.99mm (14ga)

Finish

No. 4 polished stainless steel finish on the exterior surface

Hinge

The concealed spring hinges allow the door panel to open 175°. Number of hinges varies with the size of door, and the placement of the hinge is on the long side of the door ("H" dimension) unless otherwise requested.

Latch

Standard

Screwdriver operated cylinder cam latch(es)

Optional Latches

1/4" allen key cylinder cam latch
 Non-locking two position handle

Optional Locks

Cylinder key lock
 1 1/8" mortise prep complete with mortise cylinder

Optional

1 1/8" mortise prep only

Flange

Exterior flange
 Width - 19mm (3/4") up to and including 914mm x 914mm (36" x 36")
 Width - 32mm (1 1/4") greater than 914mm x 914mm (36" x 36")

Frame Depth

"D" = 45mm (1 3/4")

Ordering

Please order by rough opening size. These doors are non-returnable.

Installation

The frame is manufactured with mounting holes. Factory installed anchor straps are available for masonry, upon request.

See size and weight chart on page 22.