



**VAN-MET® MODEL NUP - Upward, Inward
Opening Panel**

manufactured to
the **VAN-MET®**
design standard

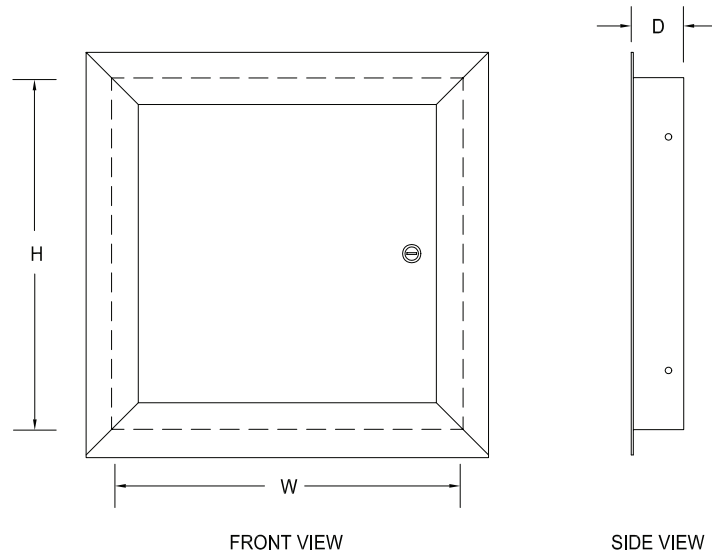

- Designed for applications when a door panel cannot swing downward or outward.
- Compliments your design situations for those unique applications.
- Perfect for use above a fixed ladder, hallways, etc.
- Back of the door panel comes standard with an inside handle.
- Available in multi-leaf panels, which are attached to each other with a concealed piano hinge.
- Available with double-leaf panels.
- Available with 25mm (1") foil faced insulation.
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line, so uniformity of design is maintained when the doors are installed in the same building.

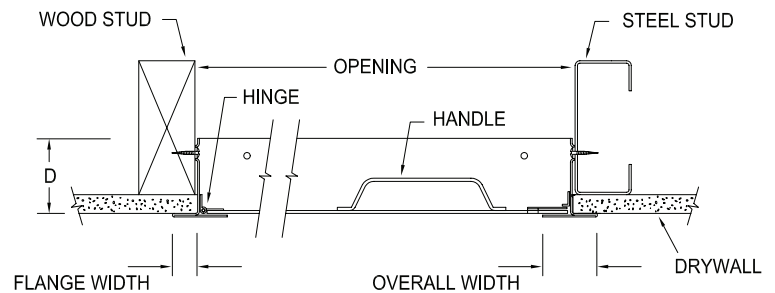

Materials

Satin finish galvanized steel or
304 stainless steel
Frame - 1.61mm (16ga)
Panel - 1.61mm (16ga)

Finishes

The paint finish is an electrostatically applied
rust inhibitive prime coat or a No. 4 polished
stainless steel finish on the exterior surface.

Hinge

The concealed continuous piano hinge
allows the door panel to open inward to 95°.
The hinge is placed on the long side of the door
("H" dimension) unless otherwise requested.

Latch

Standard

Screwdriver operated cam latch(es)

Optional Latches

3/16" allen key cam
Non-locking two position handle

Optional Locks

Cylinder Key Lock
1 1/8" mortise prep complete with mortise cylinder

Optional

1 1/8" mortise prep only

Flange

Exterior flange
Width - 22mm (7/8")
Overall width - 38mm (1 1/2")

Frame Depth

"D" = 51mm (2")

Ordering

Please order by rough opening size.
These doors are non-returnable.

Installation

The frame is manufactured with
embossed mounting holes.

See size and weight chart on page 23.