



Insulated with Air and Water Resistant Seal.

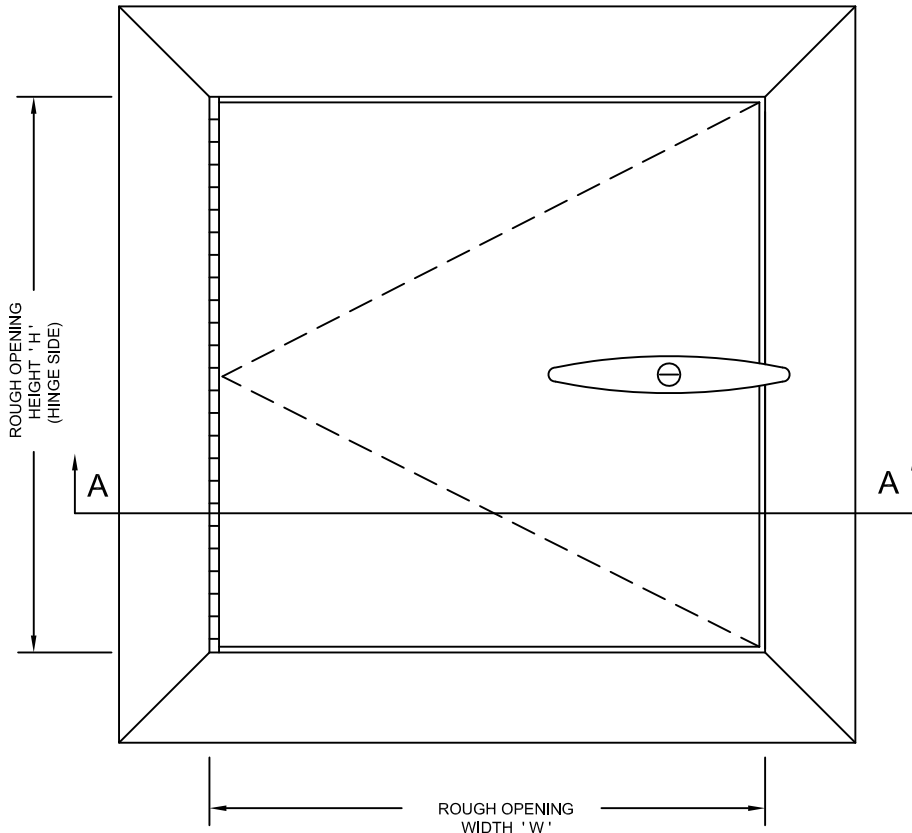

FRONT ELEVATION

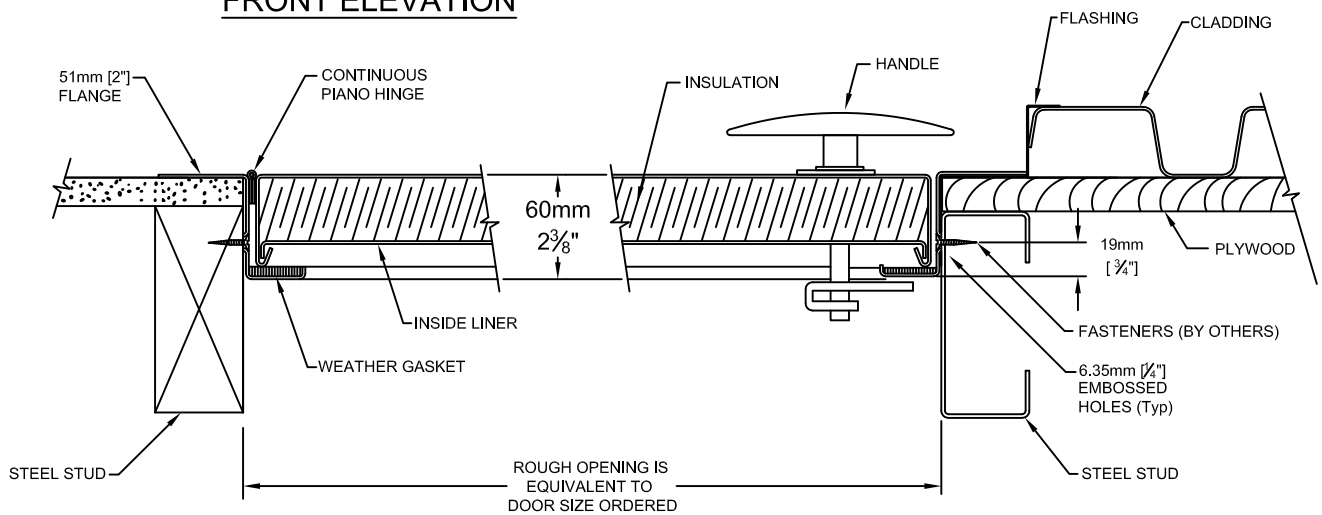

SECTION A-A

STANDARD CONSTRUCTION:

- MATERIAL** - SATIN FINISH GALVANIZED (GALVANNEALED) STEEL.
- PANEL** - 1.31mm [18 ga]
- LINER** - 1.31mm [18 ga]
- FRAME** - 1.31mm [18 ga]
- FLANGE** - 51mm [2"] EXTERIOR FLANGE.
- HINGE** - CONTINUOUS STAINLESS STEEL PIANO HINGE. [OPENS TO 180°]
- LATCH** - LOCKING HANDLE, OPERABLE FROM HANDLE SIDE ONLY.
- GASKET** - FRAME GASKETED ON ALL FOUR SIDES.
- INSULATION** - 51mm [2"] THICK FIBERGLASS.
- FINISH** - RUST INHIBITIVE PRIME COAT (OFF-WHITE).

* Specifications subject to change without notice.

PROJECT: _____

CONTRACTOR: _____

ARCH. OR ENG.: _____

DATE: _____

△ Revised 08/10/16

These drawings are the property of Maxam Metal Products Ltd. and incorporates information which is proprietary. Publication and/or public distribution in whole or in part is expressly prohibited without the prior written consent of Maxam Metal Products Ltd. The information herein remains the property of Maxam Metal Products Ltd. All rights reserved.

DWN BY KB	DATE Feb. / 2014	DWG. NO. Sheet 1 of 2	REV. △
--------------	---------------------	--------------------------	-----------

INSTALLATION:

The frame is manufactured with embossed mounting holes. Mounting holes are available on the exterior flange as an option.

WARRANTY:

One Year Limited warranty. For complete details see **Access Door** warranty document.

NWR - STANDARD SIZES

Rough Opening Size W x H		No. of Handles	Weight in kgs.	Weight in lbs.
Metric (mm)	Inches			
305 x 305	12 x 12	1	6.64	14.65
305 x 610	12 x 24	1	8.84	19.50
356 x 356	14 x 14	1	6.80	15.00
406 x 406	16 x 16	1	8.16	18.00
457 x 457	18 x 18	1	9.52	21.00
457 x 610	18 x 24	1	11.79	26.00
508 x 508	20 x 20	1	11.11	24.50
559 x 762	22 x 30	1	16.55	36.50
559 x 914	22 x 36	2	19.50	43.00
559 x 1219	22 x 48	2	24.94	55.00
559 x 1524	22 x 60	2	30.39	67.00
559 x 1829	22 x 72	2	35.38	78.00
610 x 610	24 x 24	1	14.74	32.50
610 x 762	24 x 30	1	17.69	39.00
610 x 914	24 x 36	2	20.41	45.00
610 x 1219	24 x 48	2	26.30	58.00
610 x 1524	24 x 60	2	31.75	70.00
610 x 1829	24 x 72	2	37.64	83.00
762 x 762	30 x 30	1	20.41	45.00
762 x 914	30 x 36	2	24.04	53.00
762 x 1219	30 x 48	2	30.84	68.00
762 x 1524	30 x 60	2	37.64	83.00
813 x 813	32 x 32	1	23.13	51.00
914 x 914	36 x 36	2	28.12	62.00
914 x 1219	36 x 48	2	35.38	78.00
914 x 1524	36 x 60	2	43.09	95.00
914 x 1981	36 x 78	2	54.43	120.00



Net Opening = Width minus 77mm [3"]
 Height minus 77mm [3"]

OPTIONS: * - DENOTES ADDITIONAL COST.

- * - NON-LOCKING COMPRESSION HANDLE, OPERABLE FROM BOTH SIDES.
- MOUNTING HOLES AVAILABLE ON EXTERIOR FLANGE.

ORDERING:

- PLEASE ORDER BY ROUGH OPENING SIZE.
- WHEN ORDERING THE SECOND DIMENSION GIVEN IS THE HINGE SIDE. (ie. 457mm x 610mm [18" x 24"], THE 610mm [24"] DIMENSION IS THE HINGE SIDE.
- THESE DOORS ARE NON-RETURNABLE.

PROJECT SCHEDULE

- millimeters
- inches

Qty	Rough Opening Size		Options
	Width	Height	



Model NWR met the performance criteria as per CSA A440-00 (windows) for an Air Tightness rating of A-3 at infiltration pressures of 75 Pa and 300 Pa and at ex-filtration pressures of 75 Pa and 300 Pa. In Water Tightness by Static Pressure the door sample met a B-4 rating, subject to using an optional watertight mechanism. Phone for details.

Testing performed by Intertek (Warnock Hersey)



PROJECT: _____

CONTRACTOR: _____

ARCH. OR ENG.: _____

DATE: _____

PURCHASE ORDER: _____

APPROVED BY: _____