

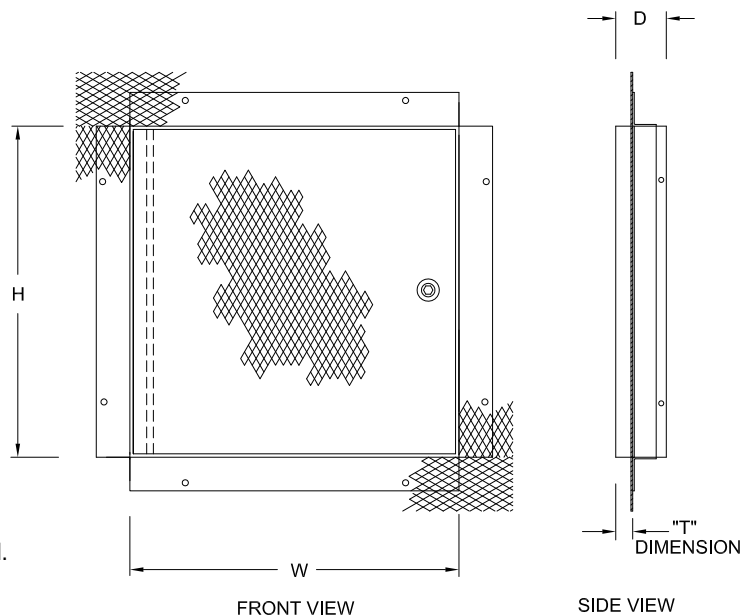


VAN-MET® MODEL NAP - Plaster Finish


manufactured to the **Van-Met®** design standard

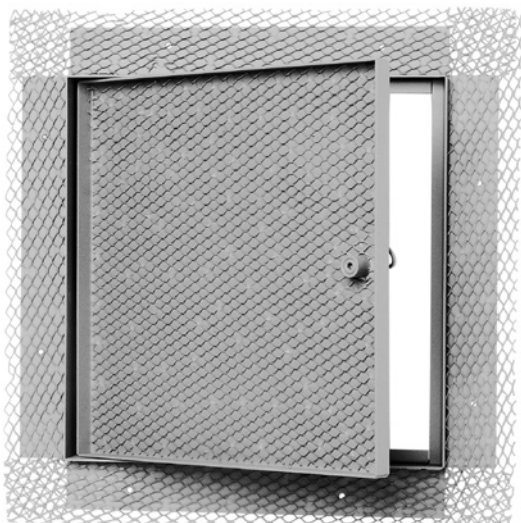

- Designed with a hidden flange specifically for use with plaster, masonry, ceramic tile, or other wall coatings.
- After finishing is complete, the door panel and frame are concealed.
- Flanges and panel have a metal lath spot welded to the frame to accept in-fill material.
- The wraparound type construction makes the frame extremely rigid.
- Standard panel depth and "T" dimension is 16mm (5/8"). Other panel depths and "T" dimensions are available upon request.
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line.

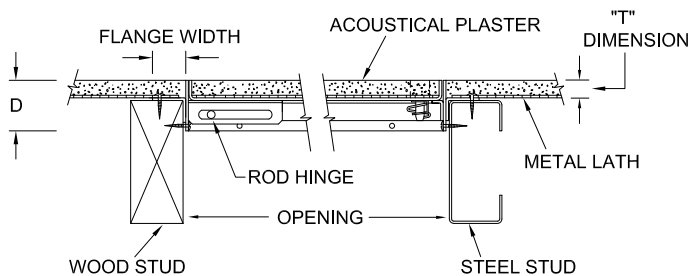

Concealed Rod Hinge

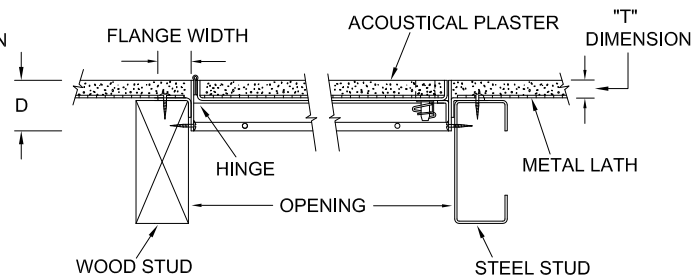

Optional: Piano Hinge

Materials

Satin finish galvanized steel
 Frame - 1.61mm (16ga)
 Panel - 1.61mm (16ga)

Finish

The paint finish is a rust inhibitive off-white prime coat.

Hinges

Rod Hinge

The concealed rod hinge is designed to secure the door panel. The hinge is placed on the long side of the door ("H" dimension) unless otherwise requested.

Optional: Piano Hinge

The continuous piano hinge allows the door panel to open 175° for easy access. The hinge is placed on the long side of the door ("H" dimension) unless otherwise requested.

Note: Piano hinge standard on doors greater than 610mm x 914mm (24" x 36").

Latch

Standard

3/16" allen key cam available in 1/2" or in a 5/8" panel depth

Optional Lock

Cylinder key lock is required for panel depths over 16mm (5/8") up to 25mm (1")

Flange

Plaster flange
 Width - 32mm (1 1/4") complete with a 51mm (2") wide metal lath

Frame Depth

"D" = 48mm (1 7/8")

Panel Depth

Standard - 16mm (5/8")
 Other depths are available upon request.

"T" dimension

Standard - 16mm (5/8")
 Other dimensions available upon request.

Ordering

When ordering, please specify the "T" dimension: depth of flange you require (i.e. "T" dimension = 16mm (5/8")). Please specify the panel depth you require and order by rough opening size. These doors are non-returnable.

Installation

The outer concealed flange and inner frame are manufactured with mounting holes. For a square fit, keep the door panel closed while installing. Install before the finishing material is applied.