



## VAN-MET® MODEL NAT - Acoustical Tile

manufactured to the **Van-Met®** design standard

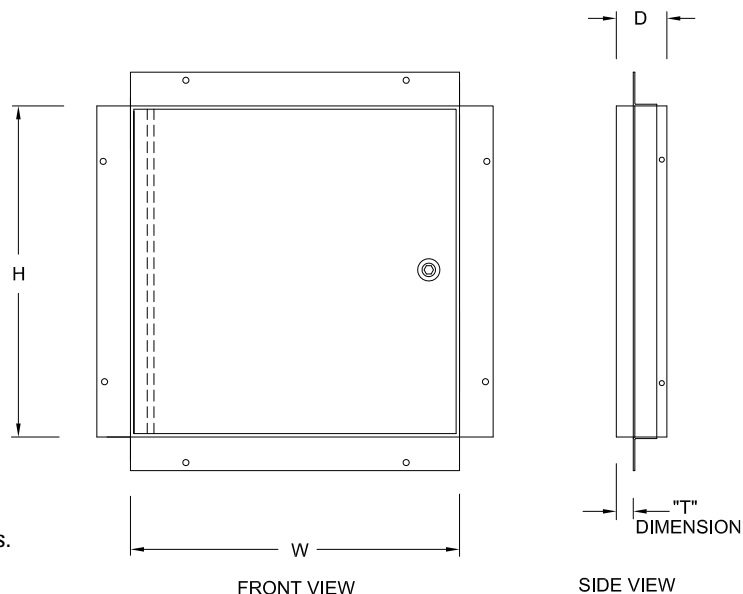

- Designed to conform to the architectural design of ceiling and wall tiles.
- Panel is recessed to accommodate acoustical tile or other materials.
- Acoustical tile is attached to the door with adhesive mastic and finished flush with the surrounding tiles, aiding in sound control.
- After finishing is complete, the door panel and frame are concealed.
- Standard panel depth and "T" dimension is 16mm (5/8"). Other panel depths and "T" dimensions are available upon request.
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line.

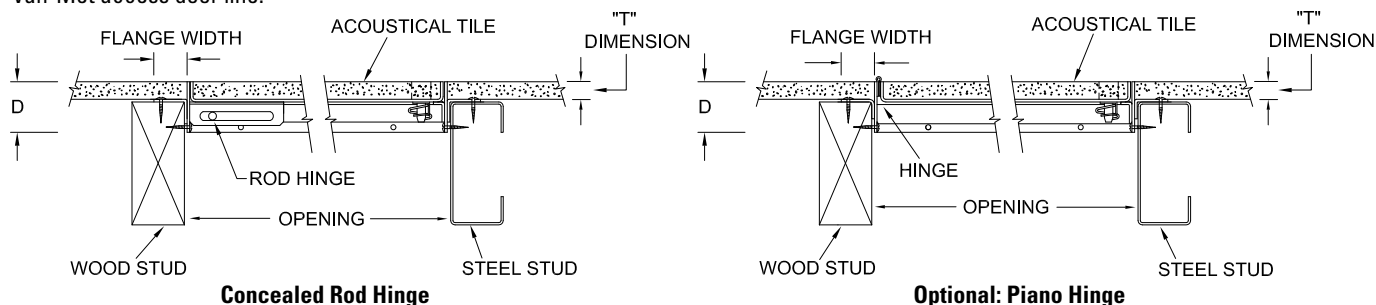

### Materials

Satin finish galvanized steel  
 Frame - 1.61mm (16ga)  
 Panel - 1.61mm (16ga)

### Finish

The paint finish is a rust inhibitive off-white prime coat.

### Hinges

#### Rod Hinge

The concealed rod hinge is designed to secure the door panel. The hinge is placed on the long side of the door ("H" dimension) unless otherwise requested.

#### Optional: Piano Hinge

The continuous piano hinge allows the door panel to open 175° for easy access. The hinge is placed on the long side of the door ("H" dimension) unless otherwise requested.

**Note:** Piano hinge standard on doors greater than 610mm x 914mm (24" x 36").

### Latch

#### Standard

3/16" allen key cam available in 1/2" or in a 5/8" panel depth.

#### Optional Lock

Cylinder key lock is required for panel depths over 16mm (5/8") up to 25mm (1").

### Flange

Recessed flange  
 Width - 32mm (1 1/4")

### Frame Depth

"D" = 48mm (1 7/8")

### Panel Depth

Standard - 16mm (5/8")  
 Other depths are available upon request.

### "T" dimension

Standard - 16mm (5/8")  
 Other dimensions available upon request.

### Ordering

When ordering, please specify the "T" dimension: depth of flange you require (i.e. "T" dimension = 16mm (5/8")). Please specify the panel depth you require and order by rough opening size. These doors are non-returnable.

### Installation

The outer recessed flange and inner frame are manufactured with mounting holes. For a square fit, keep the door panel closed while installing. Install before the finishing material is applied.