



VAN-MET® MODEL NFM - Surface Mount

manufactured to the **Van-Met®** design standard

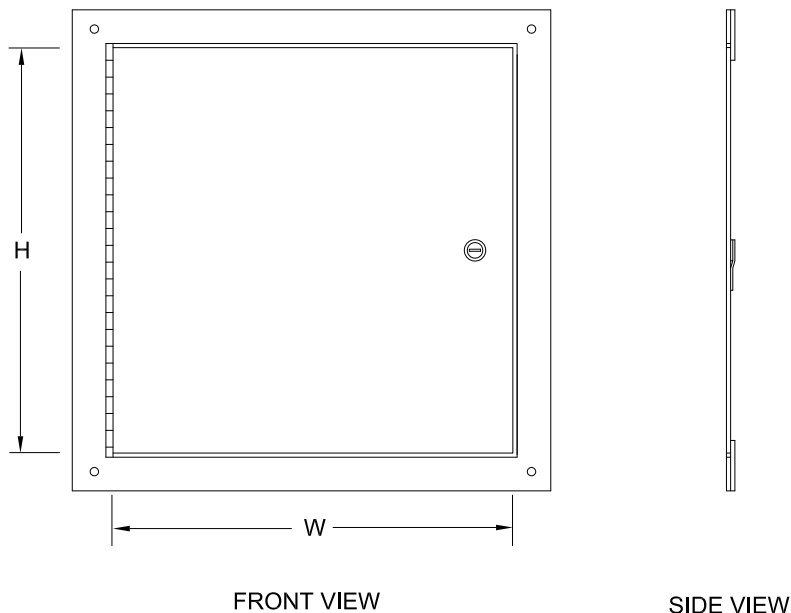

- Surface mount, no inner frame.
- Ideal when objects (pipes, etc.) interfere with the placement of the inner door frame.
- Perfect for odd shaped openings in a wall or ceiling application.
- The panel is secured to the outer flange with a continuous piano hinge, which allows the door panel to open 175° for easy access.
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line, so uniformity of design is maintained when the doors are installed in the same building.

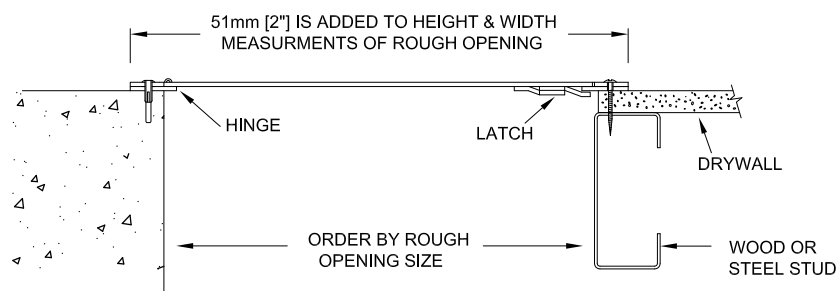

Materials

Satin finish galvanized steel or 304 stainless steel
 Frame – 1.61mm (16ga)
 Panel – 1.61mm (16ga)

Finishes

The paint finish is a rust inhibitive off-white prime coat or a No. 4 polished stainless steel finish on the exterior surface.

Hinge

The continuous piano hinge allows the door panel to open 175° for easy access. The hinge is placed on the long side of the door ("H" dimension) unless otherwise requested.

Latch

Standard

Screwdriver operated cam latch(es)

Optional Latches

Torx head cam
 3/16" allen key cam
 Non-locking two position handle

Optional Lock

Cylinder key lock

Flange/Frame

Width - 25mm (1")

Ordering

Please order by rough opening size. See sizing chart for detailed information. These doors are non-returnable.

Installation

The panel is surface mounted through the holes on the outer flange.