



VAN-MET[®] MODEL NRP - Removable Panel

manufactured to
the **Van-Met[®]**
design standard

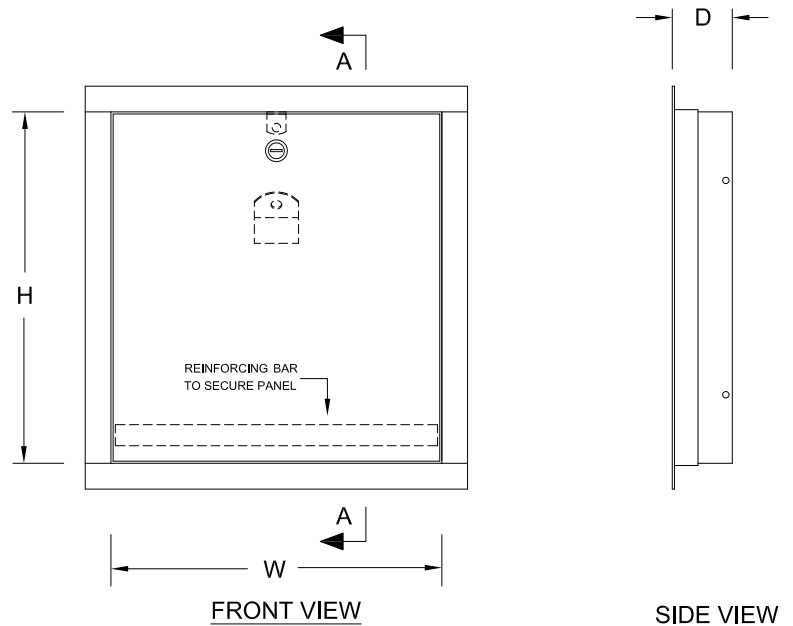

- The panel has a reinforcing bar that secures the panel onto the frame and is located on the "W" dimension which is the first number cited when placing an order. Simply unlatch the panel and remove.
- Ideal when the panel needs to be removed, providing unobstructed access.
- Designed with an exposed flange width to proportionally match the size of the door panel, creating an attractive appearance.
- Surface mounted, installed after the finishing materials have been applied. Simply frame in, cut rough opening and install.
- Larger sizes recommended for wall application only.
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line, so uniformity of design is maintained when the doors are installed in the same building.

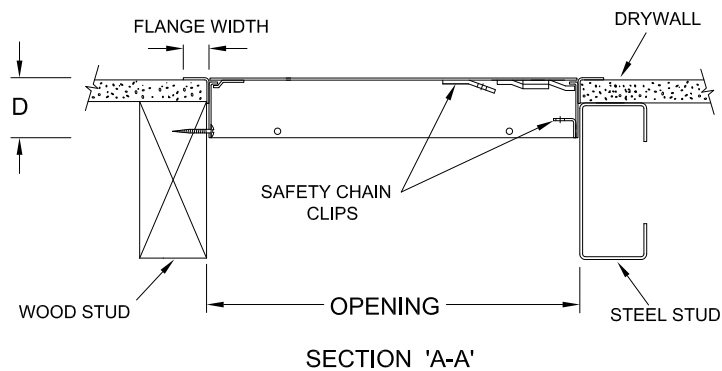

Materials

Satin finish galvanized steel or 304 stainless steel
Frame - 1.61mm (16ga)
Panel - 1.61mm (16ga)

Finishes

The paint finish is a rust inhibitive off-white prime coat or a No. 4 polished stainless steel finish on the exterior surface.

Hinge

This door does not have any hinges because the panel is designed to be removed.

Latch

Standard

Screwdriver operated cam latch(es)

Optional Latches

³/₁₆" allen key cam
Non-locking two position handle

Optional Lock

Cylinder key lock

Panel

Complete with safety chain

Flange

Exterior flange
Width - 19mm (³/₄" up to and including
914mm x 914mm (36" x 36")
Width - 32mm (1¹/₄" when greater than
914mm x 914mm (36" x 36")

Frame Depth

"D" = 45mm (1³/₄")

Ordering

Please order by rough opening size.
These doors are non-returnable.

Installation

The frame is manufactured with mounting holes.