



VAN-MET® MODEL NSM - Exterior Flange

manufactured to the **Van-Met®** design standard

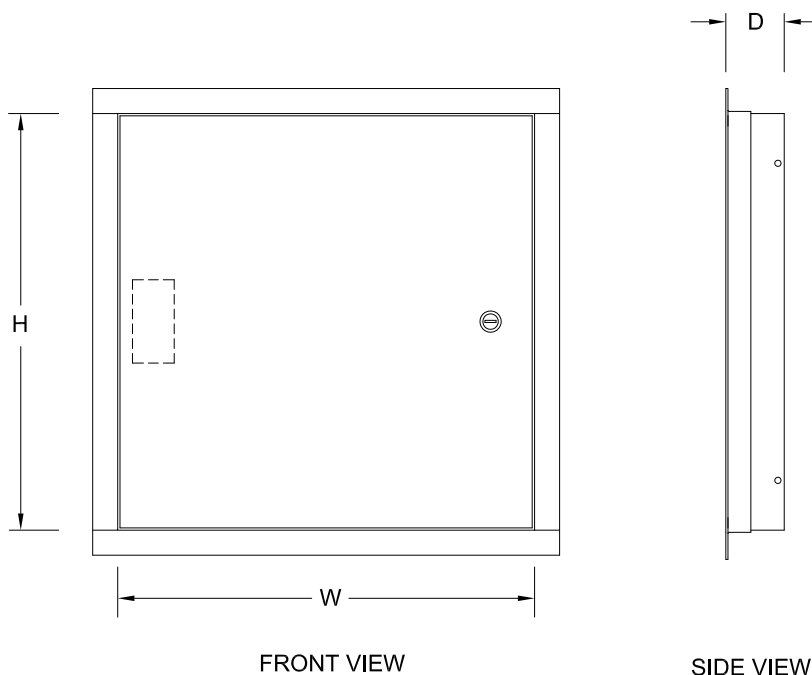

- This sturdy versatile panel is designed for installation in all types of building materials and is ideal for new construction or remodeling work.
- Install after the finishing materials have been applied. Simply frame in, cut rough opening and install.
- Designed with an exposed flange width to proportionally match the size of the door panel, creating an attractive appearance.
- Flange width can be customized to suit your needs.
- Van-Met concealed zinc plated spring hinges allow panel to open 175° for easy access.
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line, so uniformity of design is maintained when the doors are installed in the same building.

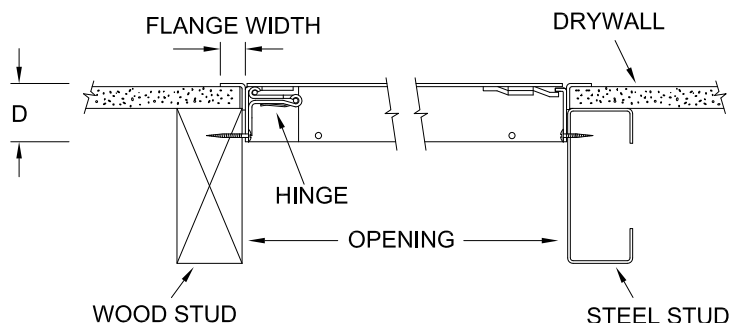

Available in stock sizes or made to your specifications.

Materials

Satin finish galvanized steel
Frame – 1.61mm (16ga)
Panel – 1.99mm (14ga)

Finish

The paint finish is a rust inhibitive off-white prime coat.

Hinge

The Van-Met concealed zinc plated spring hinges allow the door panel to open 175°. Number of hinges varies with the size of door, and the placement of the hinge is on the long side of the door ("H" dimension) unless otherwise requested.

Latch

Standard

Screwdriver operated cam latch(es)

Optional Latches

Torx head cam
3/16" allen key cam
Non-locking two position handle

Optional Locks

Cylinder key lock
1 1/8" mortise prep complete with mortise cylinder

Optional

1 1/8" mortise prep only

Flange

Exterior flange
Width - 19mm (3/4") up to and including 914mm x 914mm (36" x 36")
Width - 32mm (1 1/4") when greater than 914mm x 914mm (36" x 36")

Frame Depth

"D" = 45mm (1 3/4")

Ordering

Please order by rough opening size.

Installation

The frame is manufactured with mounting holes. Factory installed anchor straps are available for masonry upon request.