
2 HOUR FIRE-RATED UNINSULATED

ACCESS PANELS - FWDL/FWDD SERIES - 2 Hour Fire-Rated Uninsulated, Double Door

The Maxam® FWD two hour fire rated uninsulated double door access panels with removable center mullion are durably designed for large size door applications while maintaining the continuity of a fire barrier when installed in vertical walls.

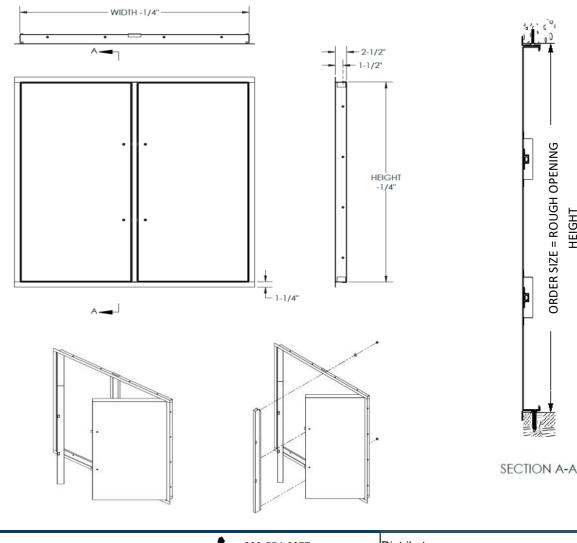

SPECIFICATIONS:

Frame Material: 16 gauge (1.6 mm) galvannealed steel. Frame Flange: 1-1/4" (32 mm) with 2" removable center mullion. Frame Depth: 2-1/2" (63.5 mm).

Door Panel Material: 16 gauge (1.6 mm) galvannealed steel. Standard Finish: Off-white prime coat.

Hinge: Concealed 3/8" steel stud rod hinge.

Closer: Zinc plated steel tension springs, automatically closes when door is open approximately 90 degrees per NFPA 80. Latch: Self-latching flush 1/4" Allen key with interior release. Sizes: Minimum 36" x 12", for smaller sizes see FWS Series. Maximum: 48" x 80" or 73.25" x 50.375".

Clear Opening: (Width minus 1½") x (Height minus 1½") with center mullion removed.

Fire-Rating:

Intertek Warnock Hersey Listed and Labeled, 2 Hour fire-rated per NFPA 252, UL 10B, CAN/ULC S104 for vertical installations.

OPTIONS:

HEIGHT

Optional Latches: Mortise lock, Mortise prep. Additional Options: Powder coat paint.

NOTE:

ORDER SIZE W x H = ROUGH OPENING

QTY		SIZE W x H Opening) mm	No. of Latches	Approx Weight Ibs.
	36 x 60	914 x 1524	4	69
	42 x 42	1067 x 1067	4	58
	42 x 60	1067 x 1524	4	79
	48 x 48	1219 x 1219	4	73
	48 x 60	1219 x 1524	4	88
			Other Size	

	Ľ,	800-554-6077	Distributor:		Project:
MAXAM METAL PRODUCTS	\succ	orders@maxammetal.com	Contractor:		Approved By:
		www.maxammetal.com	Date:	Quantity:	Architect:
9702 Newton Av S. Bloomington, MN 55431 Many Locations Nationwide			Scale: N/A	Pages: 1 of 1	Item #
@ 2022 Activar Construction Products Group, Inc.			SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS G N OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PR		REV A – JUNE 9, 202