


**🔥 2 HOUR FIRE-RATED UNINSULATED
ACCESS PANELS - FWSL/FWSD SERIES - 2 Hour Fire-Rated Uninsulated, Single Door**

The Maxam® FWS two hour fire-rated uninsulated single door access panels are durably designed for large size door applications while maintaining the continuity of a fire barrier when installed in vertical walls.

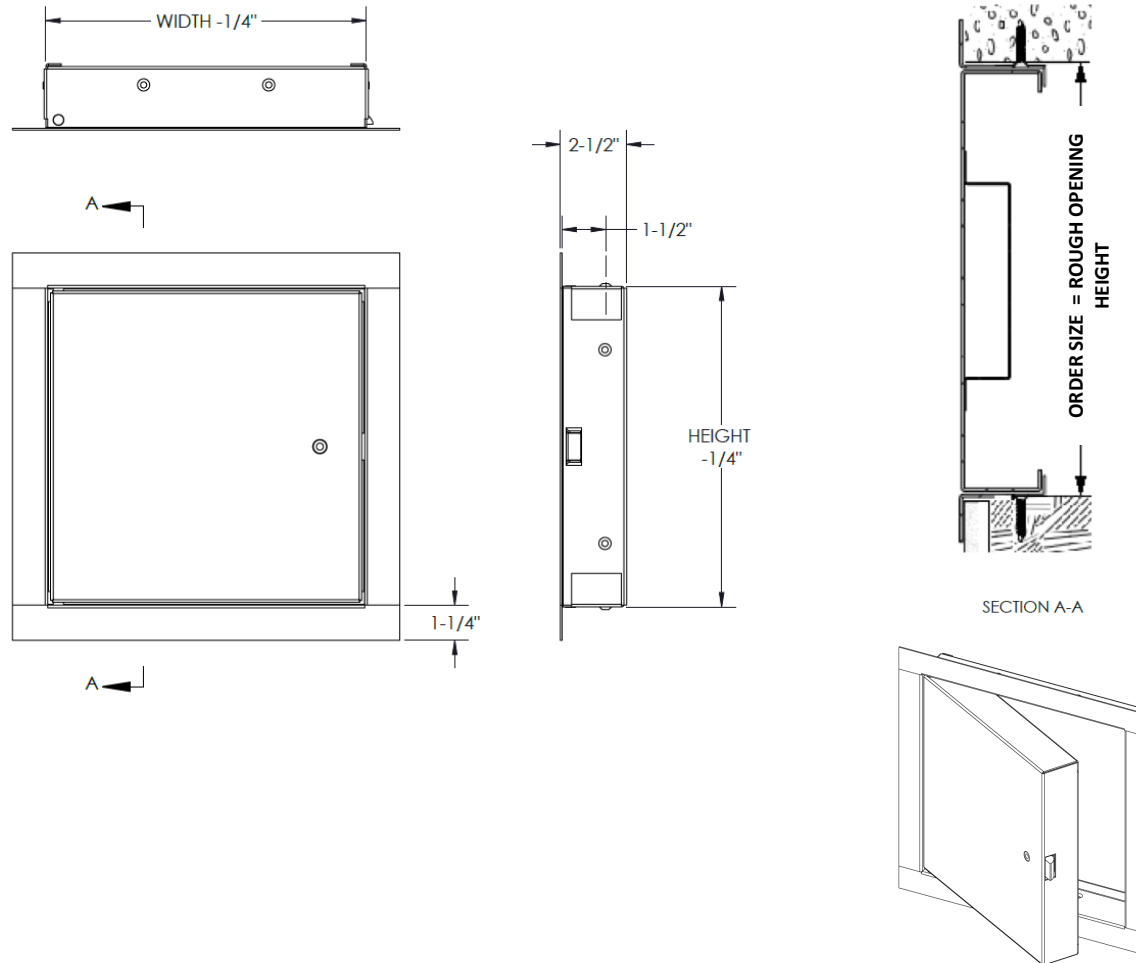

SPECIFICATIONS:

- Frame Material:** 16 gauge (1.6 mm) galvanized steel
- Frame Flange:** 1-1/4" (32 mm)
- Frame Depth:** 2 1/2" (63.5 mm)
- Door Panel Material:** 16 gauge (1.6 mm) galvanized steel
- Standard Finish:** Off-white prime coat
- Hinge:** Concealed 3/8" steel stud rod hinge
- Closer:** Zinc plated steel tension springs. Automatically closes when door is open approximately 90° per NFPA 80.
- Latch:** Self-latching flush 1/4" Allen key with interior release
- Sizes:** Minimum 18" x 18"
Maximum: 30" x 80" or 36" x 50"
- Clear Opening:** (Width minus 1 1/2") x (Height minus 1 1/2")
- Fire-Rating:** Intertek Warnock Hersey Listed and Labeled, 2 Hour fire-rated per NFPA 252, UL 10B, CAN/ULC S104 for vertical installations





OPTIONS:

- Optional Latches:** Mortise lock, Mortise preparation
- Additional Options:** Powder coat

NOTE:

ORDER SIZE W x H = ROUGH OPENING

QTY	ORDER SIZE W x H (Rough Opening)		No. of Latches	Approx. Weight lbs
	Inches	mm		
	24 x 30	610 x 762	1	28
	24 x 36	610 x 914	1	32
	24 x 48	610 x 1219	2	45
	30 x 30	762 x 762	2	34
	30 x 36	762 x 914	2	39
	30 x 48	762 x 1219	2	49
	30 x 60	762 x 1524	2	60
	30 x 80	762 x 2032	2	75
	32 x 32	813 x 813	2	38
	36 x 36	914 x 914	2	45
	36 x 48	914 x 1219	2	57
	36 x 50	914 x 1270	2	69
				Other Size

 <p>MAXAM METAL PRODUCTS</p> <p>9702 Newton Av S. Bloomington, MN 55431 Many Locations Nationwide</p>	 800-554-6077	Distributor:		Project:		
	 orders@maxammetal.com	Contractor:		Approved By:		
	 www.maxammetal.com	Date:	Quantity:	Architect:		
	Scale: N/A		Pages: 1 of 1	Item #		
© 2022 Activar Construction Products Group, Inc. THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OF AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PROHIBITED.						