


2 HOUR FIRE-RATED ACCESS PANELS - FWS SERIES: UNINSULATED, SINGLE DOOR

Our FWS two hour fire-rated uninsulated single door access panels are durably designed for large size door applications while maintaining the continuity of a fire barrier when installed in vertical walls.

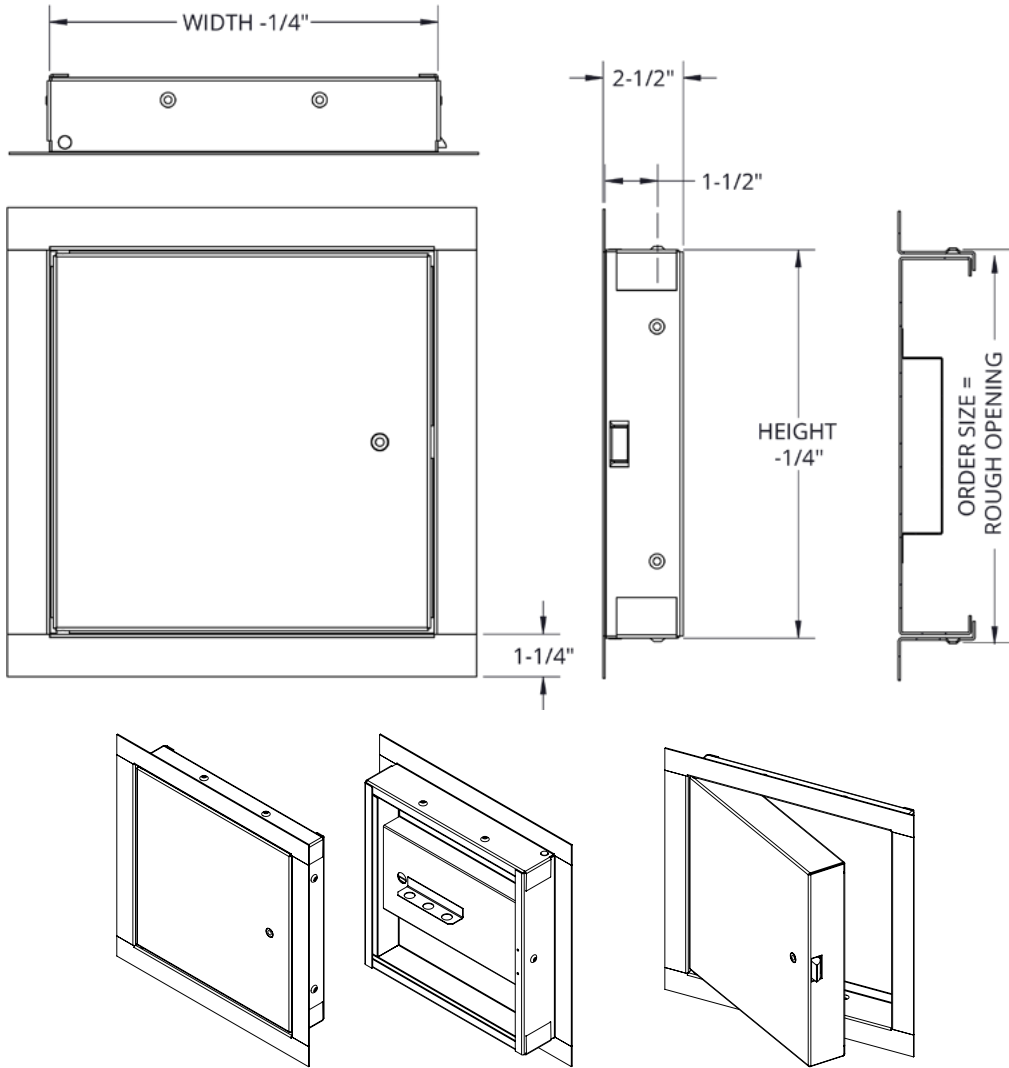

SPECIFICATIONS:

Frame Material: 16 gauge (1.61mm) galvalneal steel

Frame Flange: 1-1/4" (32mm)

Frame Depth: 2-1/2" (63.5 mm)

Door Panel Material: 16 gauge (1.6 mm) galvalneal steel

Standard Finish: Off white prime coat

Hinge: Concealed 3/8" steel stud rod hinge

Closer: Zinc-plated steel tension springs that automatically close when door is open ~90° per NFPA 80

Latch: Self-latching, flush 1/4" Allen key with interior release

Sizes:

Minimum: 18" x 18" (457 x 457 mm)

Maximum: 30" x 80" (762 mm x 2032 mm) or 36" x 50" (914 mm x 1270 mm)

Clear Opening: Width minus 1-1/2" (38 mm) x Height minus 1-1/2" (38mm)

FIRE-RATING:

Intertek Warnock Hersey Listed and Labeled: 2 Hour Fire-Rating per NFPA 252, UL 10B, CAN/ULC S104 for vertical installations

OPTIONS:

Optional Latches: Mortise lock, mortise preparation

Additional Options: Smoke gasket, masonry anchor straps, powder coat finish



NOTE:

ORDER SIZE W X H = ROUGH OPENING

COMMON SIZES

QTY	Order Size W X H (Rough Opening)		No. of Latches	Approx. Weight	
	inches	mm		kg	lbs
	18 x 18	457 x 457	1	6.80	15
	24 x 30	610 x 762	1	12.70	28
	24 x 36	610 x 914	1	14.51	32
	24 x 48	610 x 1219	2	20.41	45
	30 x 30	762 x 762	2	15.42	34
	30 x 36	762 x 914	2	17.69	39
	30 x 48	762 x 1219	2	22.22	49
	30 x 80	762 x 2032	2	34.02	75
	36 x 36	914 x 914	2	20.41	45
	36 x 48	914 x 1219	2	25.85	57
	Custom - specify size:				

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

  MAXAM	800-554-6077 sales@activarcpg.com www.activarcpg.com	Distributor:		Project:	
		Contractor:		Approved By:	
CANADA ONLY: 604-433-4243 info@maxammetal.com maxammetal.com	Scale: N/A	Date:		Architect:	
		Page 1 of 1		Item#:	