


Designed for installation in all types of building materials and is ideal for new construction or remodeling work.

GENERAL PURPOSE DOOR

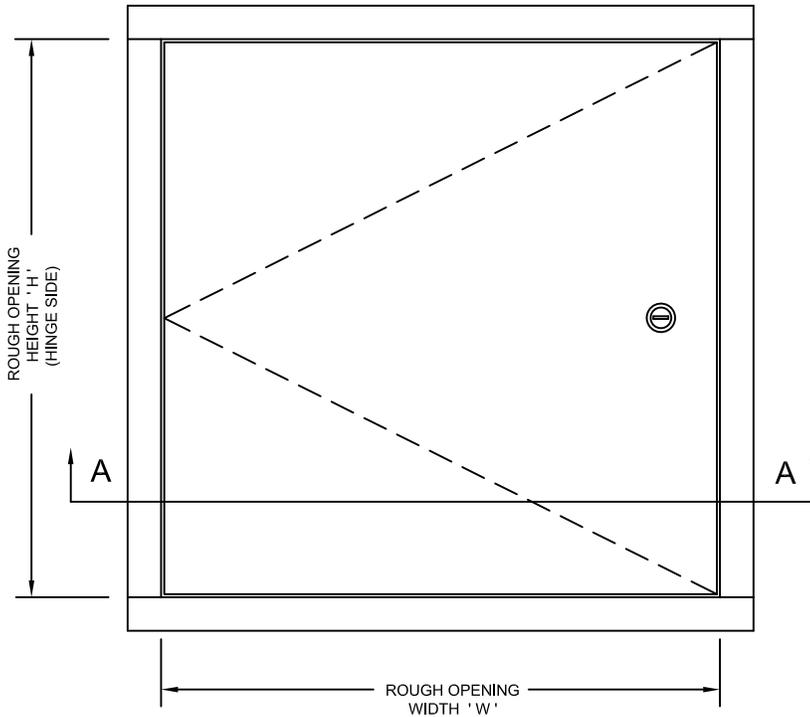

FRONT ELEVATION

**STANDARD CONSTRUCTION:**

**MATERIAL** - SATIN FINISH GALVANIZED (GALVANNEALED) STEEL.

**PANEL** - 1.99mm [14 ga.]

**FRAME** - 1.61mm [16 ga.]


**FLANGE** - 19mm [ $\frac{3}{4}$ "] UP TO AND INCLUDING 914mm x 914mm [36" x 36"].  
 32mm [ $1\frac{1}{4}$ "] GREATER THAN 914mm x 914mm [36" x 36"].

**HINGE** - CONCEALED ZINC PLATED SPRING HINGES (OPENS TO 175°).  
 NUMBER OF HINGES VARIES WITH SIZE OF DOOR.

**LATCH** - SCREWDRIVER OPERATED CAM LATCH. NUMBER OF LATCHES VARIES WITH SIZE OF DOOR.

**FINISH** - RUST INHIBITIVE PRIME COAT (OFF-WHITE).

\* Specifications subject to change without notice.

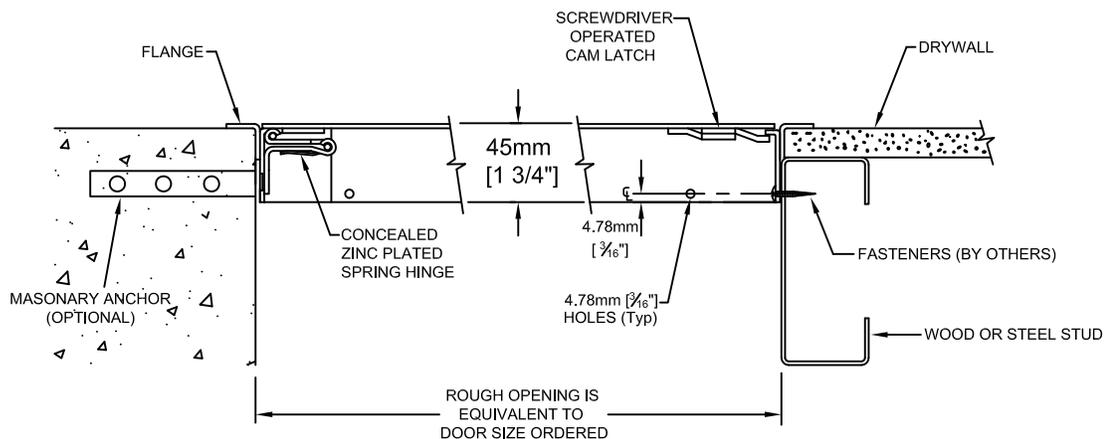

SECTION A-A

PROJECT: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

ARCH. OR ENG.: \_\_\_\_\_

DATE: \_\_\_\_\_

These drawings are the property of Maxam Metal Products Ltd. and incorporates information which is proprietary. Publication and/or public distribution in whole or in part is expressly prohibited without the prior written consent of Maxam Metal Products Ltd. The information herein remains the property of Maxam Metal Products Ltd. All rights reserved.

DWN BY KB	DATE Feb. / 2014	DWG. NO. Sheet 1 of 2	REV. 
--------------	---------------------	--------------------------	---

