


Designed for applications when a door panel cannot swing downward or outward.


STANDARD CONSTRUCTION:

- MATERIAL** - SATIN FINISH GALVANIZED (GALVANNEALED) STEEL.
- PANEL** - 1.61mm (16ga)
- FRAME** - 1.61mm (16ga)
- FLANGE** - 22mm [$\frac{7}{8}$ "] EXTERIOR FLANGE.
- HINGE** - CONTINUOUS PIANO HINGE (OPENS TO 95°).
- LATCH** - SCREWDRIVER OPERATED CAM LATCH. NUMBER OF LATCHES VARIES WITH SIZE OF DOOR.
- FINISH** - RUST INHIBITIVE PRIME COAT (OFF-WHITE).

* Specifications subject to change without notice.

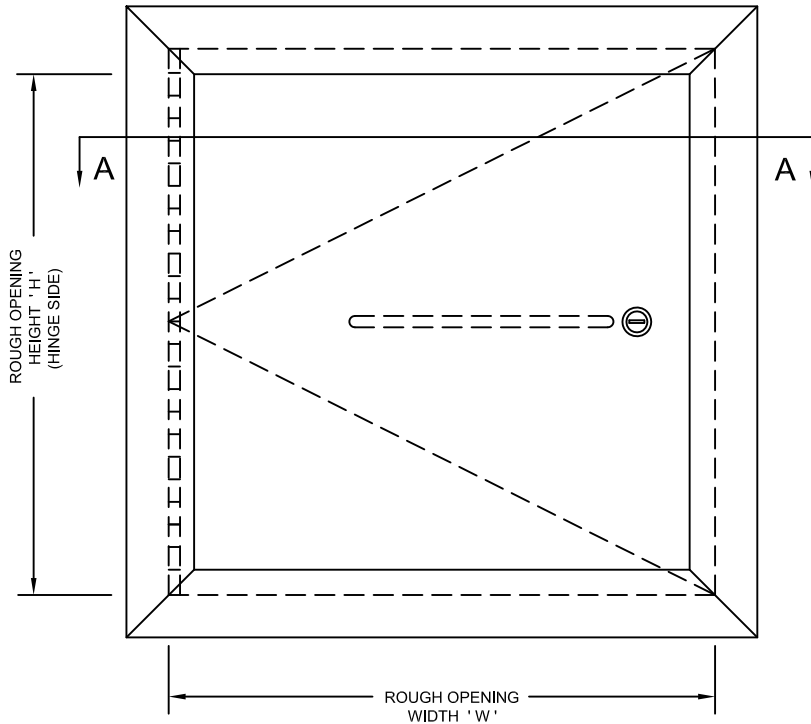

FRONT ELEVATION

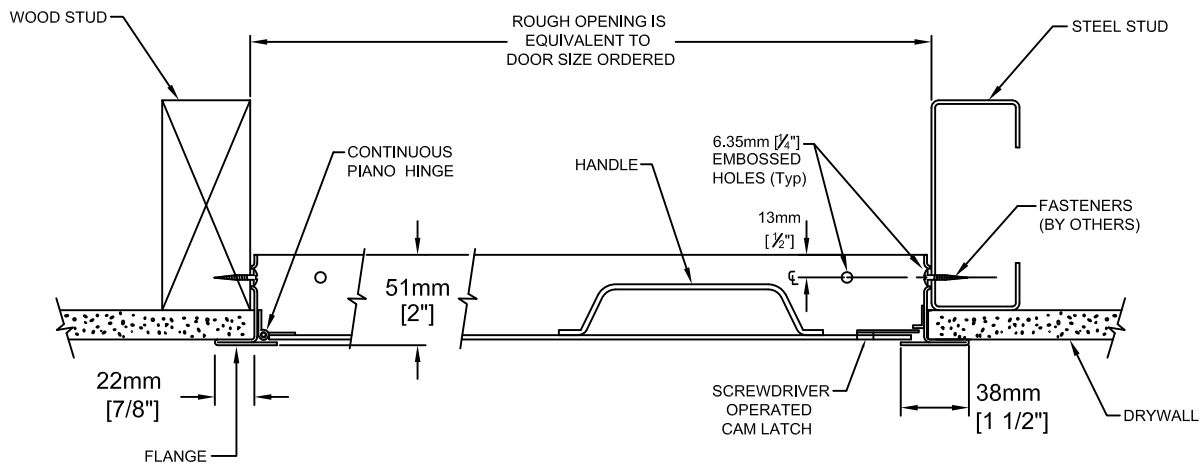

SECTION A-A


PROJECT: _____

CONTRACTOR: _____

ARCH. OR ENG.: _____

DATE: _____

These drawings are the property of Maxam Metal Products Ltd. and incorporates information which is proprietary. Publication and/or public distribution in whole or in part is expressly prohibited without the prior written consent of Maxam Metal Products Ltd. The information herein remains the property of Maxam Metal Products Ltd. All rights reserved.

DWN BY KB	DATE Feb. / 2014	DWG. NO. Sheet 1 of 2	REV. 
--------------	---------------------	--------------------------	---

INSTALLATION:

The frame is manufactured with embossed mounting holes.

ORDERING:

- PLEASE ORDER BY ROUGH OPENING SIZE.
- WHEN ORDERING THE SECOND DIMENSION GIVEN IS THE HINGE SIDE. (ie. 457mm x 610mm [18" x 24"], THE 610mm [24"] DIMENSION IS THE HINGE SIDE.
- **THESE DOORS ARE NON-RETURNABLE.**

WARRANTY:

One Year Limited warranty. For complete details see **Access Door** warranty document.

OPTIONS: * - DENOTES ADDITIONAL COST.

- * - 3/16" ALLEN KEY CAM.
- * - TORX HEAD CAM.
- * - NON-LOCKING TWO POSITION HANDLE.
- * - CYLINDER KEY LOCK (NON RE-KEYABLE) KEYED ALIKE.
- * - 1 1/8" MORTISE PREP ONLY.
- * - 1 1/8" MORTISE PREP COMPLETE WITH MORTISE CYLINDER.
- * - 25mm [1"] FOIL FACED INSULATION.
- * - DOUBLE LEAF CONSTRUCTION.
- * - MULTI LEAF CONSTRUCTION (NOT AVAILABLE WITH INSULATION).
- * - 304 STAINLESS STEEL WITH A NO. 4 POLISHED FINISH ON THE EXTERIOR SURFACE.
- * - HANDLE ON FACE OF DOOR (BOTH SIDES).

NUP - STANDARD SIZES

Rough Opening Size W x H		No. of Latches	Weight in kgs.	Weight in lbs.
Metric (mm)	Inches			
406 x 406	16 x 16	1	4.53	10.00
457 x 457	18 x 18	1	5.55	12.25
457 x 610	18 x 24	1	6.91	15.25
508 x 508	20 x 20	1	6.57	14.50
559 x 559	22 x 22	1	7.71	17.00
559 x 762	22 x 30	1	10.09	22.25
559 x 914	22 x 36	2	11.79	26.00
610 x 610	24 x 24	1	8.84	19.50
610 x 762	24 x 30	1	10.77	23.75
610 x 914	24 x 36	2	12.70	28.00
762 x 762	30 x 30	1	13.04	28.75
762 x 914	30 x 36	2	16.66	36.75
813 x 813	32 x 32	2	14.62	32.25
914 x 914	36 x 36	2	19.27	42.50



PROJECT SCHEDULE

- millimeters
- inches

Qty	Rough Opening Size		Options
	Width	Height	



Net Opening = Width minus 39mm [1 1/2"]
 Height minus 39mm [1 1/2"]

PROJECT: _____

PURCHASE ORDER: _____

CONTRACTOR: _____

APPROVED BY: _____

ARCH. OR ENG.: _____

DATE: _____