
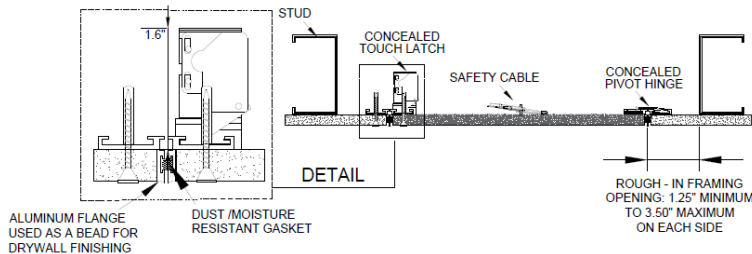


# NDT ACCESS PANEL

Concealed Access Door with Aluminum Frame and Mold-Tough Drywall Inlay  
(For All Drywall Surfaces)

## Data Sheet

Virtually Invisible - Architectural Aluminum Wall and Ceiling Frame Assembly, Complete With 1/2" or 5/8" Mold-Tough Drywall Inlay, Removable Door, Concealed Touch Latch, Dust Resistant Gasket and Safety Cable

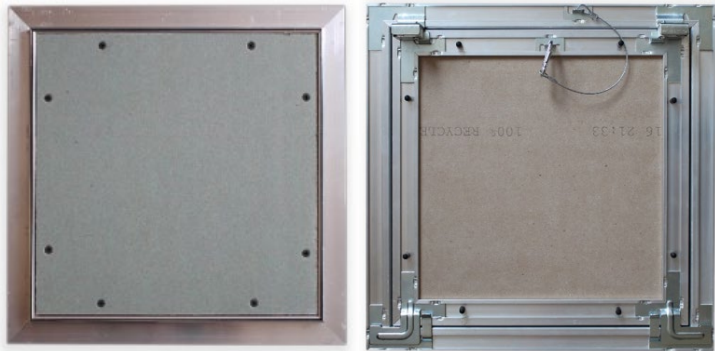


Size in inches	Size in mm	Weight for 1/2" Drywall	Weight for 5/8" Drywall
6" x 6"	152 x 152	3.41 Lbs	3.75 Lbs
8" X 8"	203 x 203	3.85 Lbs	4.41 Lbs
10" x 10"	254 x 254	4.36 Lbs	5.19 Lbs
12" X 12"	304 x 304	4.94 Lbs	6.09 Lbs
14" x 14"	356 x 356	5.59 Lbs	7.11 Lbs
16" X 16"	406 x 406	6.31 Lbs	8.25 Lbs
18" X 18"	457 x 457	7.10 Lbs	9.52 Lbs
20" X 20"	508 x 508	7.96 Lbs	10.91 Lbs
24" X 24"	609 x 609	9.88 Lbs	14.05 Lbs
24" x 36"	609 x 914	13.26 Lbs	19.47 Lbs
24" X 48"	609 x 1219	16.35 Lbs	24.55 Lbs
36" X 36"	914 x 914	17.76 Lbs	26.93 Lbs

### NDT Access Door Material Specification

- Material: Aluminum extrusion with mold tough drywall inlay
- Door and Hinge: Fully removable door with concealed pivot hinge
- Applications: Ceilings or Walls (**For wall applications hinge MUST be located at the bottom of the panel**)
- Standard features: Concealed Touch Latch, Mold-tough drywall, Safety cable, Dust and moisture resistant gasket
- Optional features: Screwdriver cam latch, Key cam latch, Magnetic cam latch, any type of 1/2" or 5/8" gypsum board inlay
- Finish: Mill finish
- Custom sizes, double leaf and multiple leaf options available upon request
- Hinge location is the last 2 digits of the product ID

Wall opening is normal door size plus + 1.25" (minimum) to 3.50" (maximum) on each side

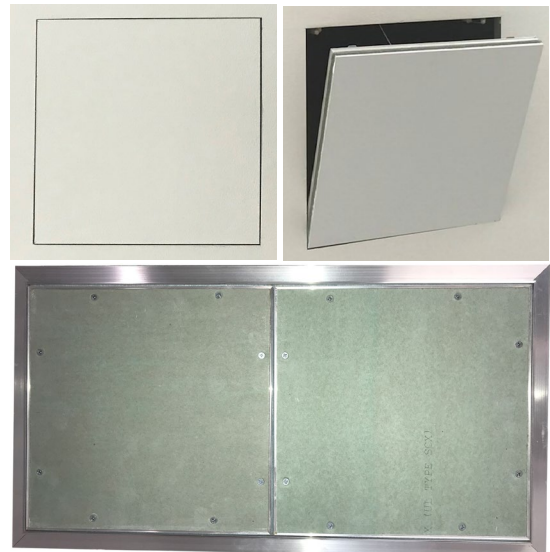

MAXAM® METAL PRODUCTS

Three Generations of Quality Metal Products

#5 - 7978 North Fraser Way

Burnaby, BC V5J 0C7

Office: 604-433-4243

Toll-Free: 1-866-446-2926