
2 HOUR FIRE-RATED ACCESS PANELS - FWD SERIES: UNINSULATED, DOUBLE DOOR

Our FWD two hour fire-rated uninsulated double door access panels with removable center mullion are durably designed for large size door applications while maintaining the continuity of a fire barrier when installed in vertical walls.

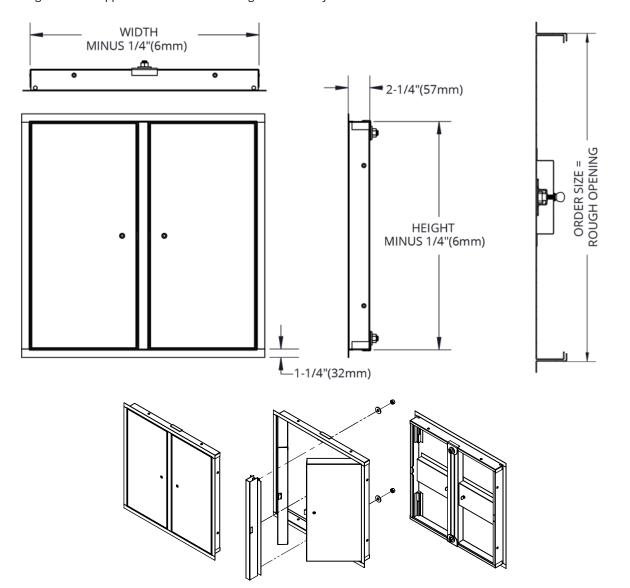

SPECIFICATIONS:

Frame Material: 16 gauge (1.61mm) galvanneal steel

Frame Flange: 1-1/4" (32mm) with 2" (51 mm) removable center mullion

Frame Depth: 2-1/2" (63.5 mm)

Door Panel Material: 16 gauge (1.6 mm) galvanneal steel

Standard Finish: Off white prime coat Hinge: Concealed 3/8" steel stud rod hinge

Closer: Zinc-plated steel tension springs that automatically close

when door is open ~90° per NFPA 80

Latch: Self-latching, flush 1/4" Allen key with interior release

Sizes:

Minimum: 36" x 12" (914 x 305 mm)

Maximum: 48" x 80" (1219 mm x 2032 mm) or 73-¼" x 50-¾" (1861

mm x 1280 mm)

Clear Opening: Width minus 1-1/2" (38 mm) x Height minus 1-1/2" (38 mm)

with center mullion removed

FIRE-RATING:

Intertek Warnock Hersey Listed and Labeled: 2 Hour Fire-Rating per NFPA 252, UL 10B, CAN/ULC S104 for vertical installations

OPTIONS:

Optional Latches: Mortise lock, mortise preparation

Additional Options: Smoke gasket, masonry anchor straps, powder coat finish

NOTE:

ORDER SIZE W x H = ROUGH OPENING

COMMON SIZES

QTY	Order Size W X H (Rough Opening)		No. of Latches	Approx. Weight	
	inches	mm	Lattiles	kg	lbs
	36 x 60	914 x 1524	4	31.30	69
	42 x 42	1067 x 1067	4	26.31	58
	42 x 60	1067 x 1524	4	35.83	79
	48 x 48	1219 x 1219	4	33.11	73
	48 x 60	1219 x 1524	4	39.92	88
	Custom	- specify size:			

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

