


STEEL CURBED ROOF HATCH MODEL RHS-5 INSULATED – FOR SHIP STAIRS/LADDER ACCESS

Size: 762mm x 1372mm (2' - 6" x 4' - 6")



- The spring hinge design offers a larger free area when roof hatch is in the open position.
- Operable from the inside by a handle and the outside with a weather proof push button release mechanism.
- Heavy-duty concealed spring hinges counterbalance the cover, allowing for easy opening and closing of the hatch.
- Enhanced EPDM weather gasketing, 25 mm (1") polyisocyanurate insulation on the curb and inside lid cover, ensuring weather tightness and energy efficiency.
- The lid has no exposed hardware to ensure against water penetration and corrosion.
- The external padlock hasp is designed to have the lock secured under the lid to protect it from the elements.
- The safety red hold open arm can be mounted on the left or right side of the hatch. This feature allows for flexibility when determining the placement of the hatch on the roof.
- Designed for ship stairs or ladder access.

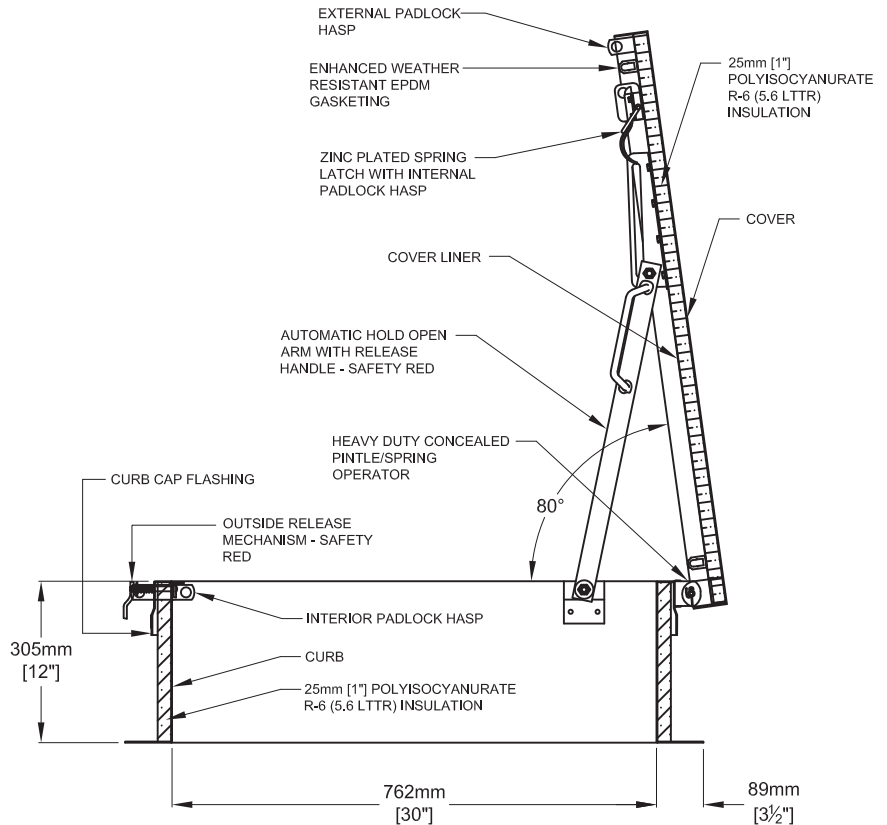

Cover

1.99mm (14ga) satin finish galvanized steel, designed to be operable internally and externally

Cover Insulation

25mm (1") polyisocyanurate R-6 (5.6 LTTR) insulation

Cover Liner

0.85mm (22ga) satin finish galvanized steel

Latch

Zinc plated spring latch with padlock hasps

Curb Frame

305mm (12") high, 1.99mm (14ga) satin finish galvanized steel

Curb Cap Flashing

1.99mm (14ga) satin finish galvanized steel with all exposed joints welded to ensure watertight construction

Curb Insulation

25mm (1") polyisocyanurate R-6 (5.6 LTTR) insulation

Mounting Flange

Width 89mm (3 1/2") complete with 11mm (7/16") mounting holes

Cover Operator

Heavy duty concealed pintle/spring operators with 2.75mm (12ga) galvanized steel hinge bracket assembly.

Automatic Hold Open Arm

Painted safety red with release handle

Weather Gasket

Enhanced weather resistant EPDM gasketing.

Locking Mechanism

Internal and external padlock hasps

Finish

Grey primer

Ordering

The second number is the hinge side. Frame into the size of the hatch ordered.

Guarantee

Manufacturer shall guarantee roof hatch against defects in material or workmanship for five years from date of shipping.

Accessories

Safety Grab Handle
Ladder
Safety Post
Safety Rail System