
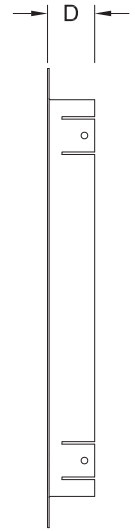


MODEL NED - Exterior Flange


manufactured to
the **Van-Met®**
design standard

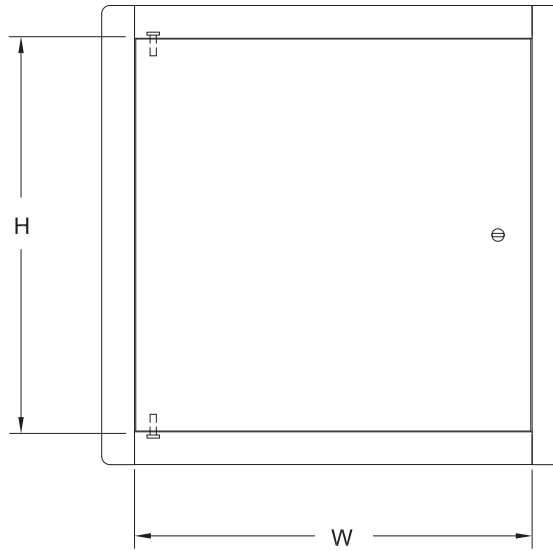

SIDE VIEW

FRONT VIEW

- Multi-Purpose Door
- Formed Door Panels for Rigidity
- Durable Powder Coat Finish
- Concealed Pin Hinges

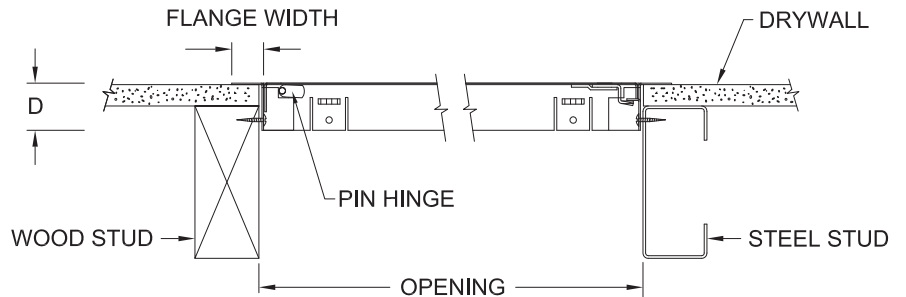

Materials

Door: 20Ga. [1 mm] galvanized steel
Mounting Frame: 20Ga. [1 mm] galvanized steel frame with a rounded profile flange provides a smooth transition to almost any installation surface.

*SIZES: 24 x 24 (610 x 610) and larger sizes:

Door: 18Ga. [1.3 mm] galvanized steel
Mounting Frame: 16Ga. [1.57 mm] galvanized steel frame with a rounded profile flange provides a smooth transition to almost any installation surface.

Hinge

Concealed

Door Latch

Screwdriver cam

Finish

Powder coated - white

Flange

Exterior flange
Width - 25 mm (1").

Frame Depth

"D" = 37 mm (1 7/16")

Ordering

Please order by rough opening size.

Installation

The frame is manufactured with mounting holes.

Rough Opening Size W x H		No. of Latches	Weight in Kgs.	Weight in Lbs.	Box Quantity	Box Weight
Metric (mm)	inch					
203 x 203	8 x 8	1	0.87	1.91	10	19.10 Lbs.
254 x 254	10 x 10	1	1.16	2.55	10	25.50 Lbs.
305 x 305	12 x 12	1	1.52	3.34	10	33.40 Lbs.
356 x 365	14 x 14	1	1.88	4.14	8	33.12 Lbs.
406 x 406	16 x 16	1	2.30	5.06	8	40.48 Lbs.
457 x 457	18 x 18	1	2.68	5.90	6	35.40 Lbs.
508 x 508	20 x 20	1	3.20	7.04	4	28.16 Lbs.
*610 x 610	24 x 24	1	5.05	11.11	2	22.22 Lbs.
*610 x 762	24 x 30	2	8.93	19.63	2	28.66 Lbs.
*610 x 914	24 x 36	2	10.44	22.96	2	34.32 Lbs.
*610 x 1219	24 x 48	2	13.46	29.60	2	48.50 Lbs.
*762 x 762	30 x 30	2	8.18	18.00	2	36.00 Lbs.

Net Opening = Width minus 38 mm (1 1/2")
Height minus 19 mm (3/4")